

PLANETA – PREMIUM PRO HAND CHAIN BLOCK - STAGE




The PREMIUM PRO Hand Chain Block is fitted with galvanised load chain made in Germany according to DIN EN 818-7-T.
Powder coated finish
Range is available from 0.5t to 10t

FEATURES

- » Compact design – light weight
- » Despite the weight saving, it has improved working stability thanks to the clever construction
- » The Premium Pro Hand Chain Block comes with a premium powder coated housing for corrosion protection - In black for entertainment
- » Easily-accessible chain mounting
- » Grade 8 Load Chain used on all hoists except 10t – 3 chain falls which is grade 10. Chain conforms with DIN EN 818-7-T Standard (RUD supply)
- » Overload protection as standard
- » Hoist up to 3t on a single chain fall
- » The standard lifting heights are 3m, 6m, 9m, 12m, 15m and 20m



1t version

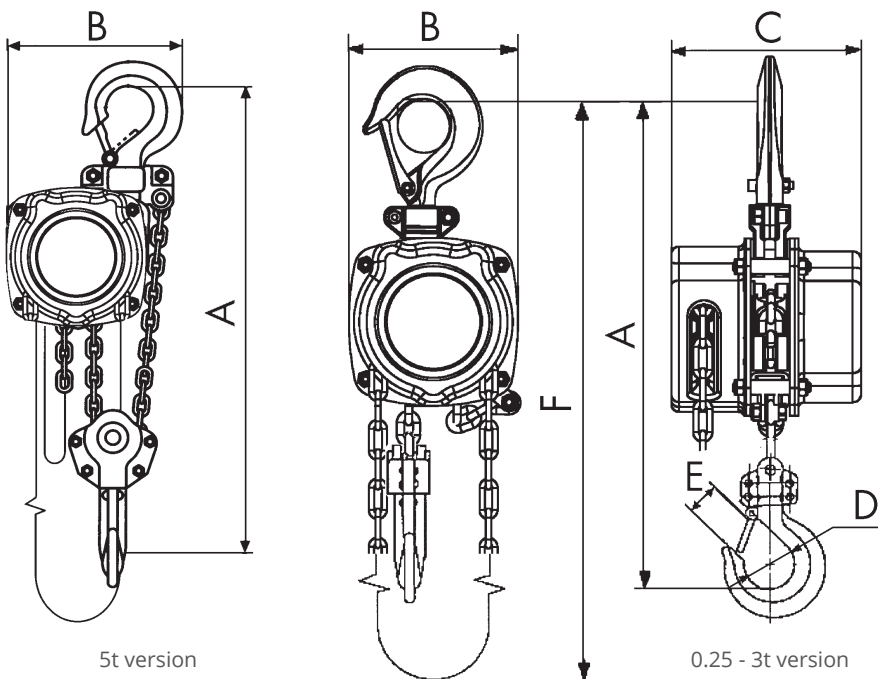

5t version

0.25 - 3t version

SPECIFICATION & DIMENSIONS

TYPE		PL/PLSPRO/050-E	PL/PLSPRO/010-E	PL/PLSPRO/020-E	PL/PLSPRO/030-E	PL/PLSPRO/500-E	PL/PLSPRO/100-E
Lifting Capacity	t	0,5	1	2	3	5	10
Standard lift	m	3	3	3	3	3	3
Min. headroom (A)	mm	309	373	460	553	630	900
Effort on hand chain	daN	24	30,5	36	37	39	39,5
Hand chain operation length	m	2,5	2,5	2,5	2,5	2,5	2,5
Number of chain falls		1	1	1	1	2	4
Load Chain size	mm	5 x 15	6 x 18	8 x 24	10 x 30	10 x 30	10 x 30
B	mm	114	152	190	240	240	391
C	mm	110	139	150	158	158	166
D	mm	33	40	52	62	72	85
E	mm	22	28	33	37	44	60
F	m	2,5	2,5	2,5	2,5	2,5	2,5
Weight with 3 m lift	kg	5,7	10,8	17,1	26,2	40	62
Weight for 1 m additional lift	kg	0,55	0,78	1,4	2,2	4,4	8,8

PLANETA – PREMIUM PRO HAND CHAIN BLOCK - STAGE



SAFETY FEATURES AND ADVANTAGES

Safety brake with two pawls hold the load in any position safely! All parts corrosion protected

Swivelling top and bottom hook

Premium Powder Coated housing

Standard overload protection (over 500 kg)

High quality spur gears

Chain mounting for lower terminal link

Ball bearing mounted load wheel shaft

CE RUD
Tempered and galvanised load chain acc. DIN EN 818-7-T (RUD supply)

New cast hook catches

COMPANY CONTACT DETAILS

LTM - Lift Turn Move Ltd
Unit 2 Stadium Court
Wirral International Business Park
Plantation Road, Bromborough
Wirral, UK CH62 3QG

SALES AND GENERAL CONTACTS

Tel: +44 (0)151 649 0467
Fax: +44 (0)151 649 0099
Email: sales@LiftTurnMove.co.uk
Email: accounts@LiftTurnMove.co.uk
Website: www.liftturnmove.co.uk

OPENING HOURS

Mon-Thur: 8:30 - 5:00
Friday: 8:30 - 2:30

The office is often open outside these times.

DELIVERIES

We use various methods of delivery and can deliver more or less whenever you need.

To stay up to date with the latest events at LTM please follow us on Facebook, Twitter and LinkedIn



liftturnmove



@LiftTurnMove



@Lift Turn Move Ltd