

### RIGID Conduit Bodies

**TYPE:** LR, Threaded  
**MATERIAL:** Copper Free Aluminum  
**FINISH:** Powder Coated

#### APPLICATIONS:

- Provides access inside raceways for wire pulling, splicing, inspection, and maintenance
- Used to make bends in conduit systems
- Used to change direction of conduit runs

#### FEATURES:

- Suitable for use in wet locations
- Suitable for use in cement
- NPT tapered hubs

#### COMPLIANCE:




File No.:  
E314478, E244047



Part No	Trade Size	Pcs/ Unit Ctn	Pcs/ Ship Ctn	Wt(lbs)/ 100pcs
80510	1/2"	10	100	22
80520	3/4"	10	50	33
80530	1"	5	25	53
80540	1-1/4"	2	10	66
80550	1-1/2"	2	10	88
80560	2"	1	5	220
80565	2-1/2"	-	1	440
80570	3"	-	1	55
80575	3-1/2"	-	1	880
80580	4"	-	1	770

#### NOMINAL DIMENSIONS (Inches):

Trade Size	A	B	C
1/2"	4.359	2.015	1.412
3/4"	4.972	2.299	1.655
1"	5.819	2.427	1.894
1-1/4"	7.795	3.391	2.685
1-1/2"	7.807	3.412	2.685
2"	9.850	4.082	3.425
2-1/2"	12.673	5.878	3.984
3"	12.583	5.898	4.448
3-1/2"	15.661	7.681	5.559
4"	15.661	7.681	5.559

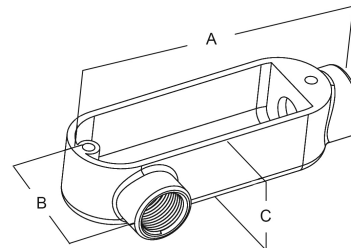

Electrical Resource International  
440.878.1199  
[www.electrical-resource.com](http://www.electrical-resource.com)