


## SCS 3, 3-way splitter, 2.4GHz

Art. Number 349823

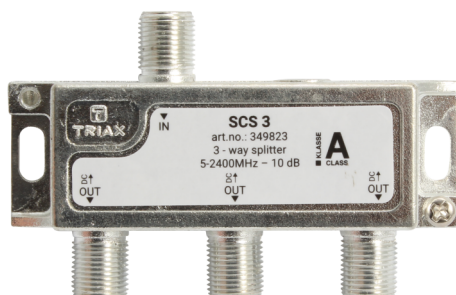

### SCS 3 - 3 way splitter

TRIAX coaxial splitter ideal for SAT-IF and MATV distribution networks.

- Frequency range 5-2400 MHz
- DC pass via diodes from all outputs
- High shielding against ingress noise like radiated by LTE mobile
- High quality die-cast housing tin (Sn) coated with solder shield bottom plate
- Grounding clamp terminals

## Technical Specifications

### ORDER INFORMATION

EAN Number 5702663498235

### SHIELDING

Shielding efficiency VHF/UHF | dB >85 dB

### FREQUENCY RANGE

Frequency range | MHz 5...2400 MHz

### LOSS

Insertion loss (in-out) 5-40 Mhz   dB	6.5 dB
Insertion loss (in-out) 40-1000 Mhz   dB	7.5 dB
Insertion loss (in-out) 1000-2150 MHz   dB	10.0 dB
Insertion loss (in-out) 2150-2400 Mhz   dB	10.5 dB

### ISOLATION

Isolation (tap-tap) 5-40 MHz   dB	23 dB
Isolation (tap-tap) 40-1000 MHz   dB	22 dB
Isolation (tap-tap) 1000-2150 MHz   dB	23 dB
Isolation (tap-tap) 2150-2400 MHz   dB	23 dB

### RETURN LOSS



## Technical Specifications

Return loss (in-out) 5-40 MHz   dB	10.0 dB
Return loss (in-out) 40-1000 MHz   dB	12.0 dB
Return loss (in-out) 1000-2150 MHz   dB	13.0 dB
Return loss (in-out) 2150-2400 MHz   dB	13.0 dB

### ELECTRICAL

Impedance   $\Omega$	75 $\Omega$
----------------------	-------------

### OPERATIONAL

Application	SAT-IF, MATV 2.4Ghz +DC(out->in)
Screening Efficiency	EN50083-2 (Class A)
DC Passthrough	Yes (max. 0.5A/24V)
Certification	EN 50581:2012 (RoHS II)
Environment	Indoor
Temperature - operating   °C	-30...+60 °C

### CONNECTORS

Number of inputs	1
Number of outputs	3
Connector Type	F-female (IEC 61 169-24)

### MECHANICAL

Main material	Zinc diecast/Sn plated
Packaging	Polybag
Packing QTY	1
Product Height   mm	47 mm
Product Width   mm	74 mm
Product Depth   mm	17 mm
Packaging Height   m	0.074 m
Packaging Width   m	0.047 m
Packaging Depth   m	0.017 m
Packaging Volume   m <sup>3</sup>	0.000 m <sup>3</sup>
Net Weight   kg	0.050 kg
Tara Weight   kg	0.003 kg
Total Weight   kg	0.053 kg