# PRODUCT CATALOG 2023

# COB (CHIPS ON BOARD)

#### Premium 24V COB LED Strip Light

Single Color 16.4 Feet IP30 Indoor Use UL-Listed

Available in warm white (3000K) and cool white (5000k)

- CRI Rating: Ra> 95+
- Can be cut and reconnected every 2.5 inches
- 2560 bright LED chips
- Dimmable with HitLights LED Dimmable Driver
- 6-Year Warranty

SKU: L0524V-303-1630-U



#### 24V COB LED STRIP LIGHT:

HitLights COB LED strip lights are the ultimate in energy efficiency, high brightness, and even lighting. These LED strip lights leaves a smooth and spotless lighting where hot spots are eliminated and appear as one single light.

#### **TECHNICAL SPECS:**

3000K warm white and 5000k cool white Light Efficiency: 100-110 Lm/w Lumen output: 360-390 Lm/ft; 24V DC output UL listed for safe lightning 3.63 watts per foot Max length run 16.4



#### UNIVERSAL COMPATIBILITY:

Compatible with most dimmers using standard control protocols including ELV, TRIAC, DMX, Dali, 0-10V, RF.

### Luma5

#### HIGH DENSITY

**Premium Luma5 LED Light Strip** Single Color 16.4 Feet- High Density IP30 Indoor Use UL-Listed

- Can be cut and reconnected every three LEDs
- Extra tough mounting adhesive backing.
- Dimmable with HitLights LED Dimmable Driver or EZDim
- 6 Year Warranty

SKU: L0512V-502-1630-U





STANDARD DENSITY **Premium Luma5 LED Light Strip** Single Color 16.4 Feet- Standard Density IP30 Indoor Use UL-Listed

- Can be cut and reconnected every three LEDs
- Dimmable with HitLights LED Dimmable Driver or EZDim
- 6 Year Warranty

SKU: L0512V-301-1630-U

PRODUCT SKU	INPUT	OUTPUT Lumens per Foot	COLOR TEMPERATURE	POWER REQUIREMENTS Watts per Foot	strip Width	LEDs	CERTIFICATION
L0512V-272-1630-U	12V	253 - 300 Im/ft	2700K Soft White 3000K Warm White 4000K Neutral White 5000K Cool White	2.6 Watts/ft	8 mm	600 per 16.4 foot roll	UL-Listed
L0512V-301-1630-U	12V	132 - 147 lm/ft	3000K Warm White 4000K Neutral White 5000K Cool White	1.3 Watts/ft	8 mm	300 per 16.4 foot roll	UL-Listed

### Luma5



HIGH DENSITY WATERPROOF **Premium Luma5 LED Light Strip** Single Color

16.4 Feet- High Density IP67 Waterproof UL-Listed

- High Density strip has twice as many LEDs and is twice as bright as the Standard Density strip
- Can be cut and reconnected every three LEDs
- Dimmable with HitLights LED Dimmable Driver or EZDim
- 6 Year Warranty

SKU: L0512V-502-1667-U

STANDARD DENSITY WATERPROOF

**Premium Luma5 LED Light Strip** Single Color 16.4 Feet- Standard Density IP67 Waterproof UL-Listed

- Can be cut and reconnected every three LEDs
- Dimmable with HitLights LED Dimmable Driver or EZDim.
- 6 Year Warranty

SKU: L0512V-501-1667-U



PRODUCT SKU	INPUT	OUTPUT Lumens per Foot	COLOR TEMPERATURE	POWER REQUIREMENTS Watts per Foot	strip Width	LEDs	CERTIFICATION
L0512V-302-1667-U	12V	300 - 330 Im/ft	3000K Warm White 5000K Cool White	2.6 Watts/ft	8 mm	600 per 16.4 foot roll	UL-Listed
L0512V-501-1667-U	12V	165 - 195 lm/ft	3000K Warm White 5000K Cool White	1.3 Watts/ft	8 mm	300 per 16.4 foot roll	UL-Listed

# Luma10



#### HIGH DENSITY

**Premium Luma10 (5050) LED Light Strip** Single Color 16.4 Feet - High Density IP-30 Indoor Use UL-Listed

- Can be cut and reconnected every three LEDs
- It comes with our new 3M mounting tape twice as strong as before!
- Dimmable with HitLights LED Dimmable Driver or Ezdim
- 6 Year Warranty

SKU: L1012V-302-1630-U



#### **Premium Luma10 (5050) LED Light Strip** Single Color 16.4 Feet Standard Density IP-30 Indoor Use UL-Listed

- Can be cut and reconnected every three LEDs
- Dimmable with HitLights LED Dimmable Driver or EzDim
- 6 Year Warranty

SKU: L1012V-301-1630-U



PRODUCT SKU	INPUT	OUTPUT Lumens per Foot	COLOR TEMPERATURE	POWER REQUIREMENTS Watts per Foot	strip Width	LEDs	CERTIFICATION
L1012V-302-1630-U	12V	384 Im/ft	3000K Warm White 5000K Cool White	3.4 Watts/ft	10 mm	300 per 16.4 foot roll	UL-Listed
L1012V-301-1630-U	12V	165 - 195 lm/ft	3000K Warm White 5000K Cool White	1.7 Watts/ft	10 mm	150 per 16.4 foot roll	UL-Listed

#### HIGH DENSITY

#### Premium Luma20 (2835) LED Light Strip

Single Color 10 Feet - High Density IP30 Indoor Use UL-Listed

- Comes with our new 3M mounting tape twice as strong as before!
- Can be cut and reconnected every three LEDs
- Dimmable with HitLights LED Dimmable Driver or EZDim
- 6 Year Warranty
- SKU: L2012V-402-1030-U





STANDARD DENSITY

**Premium Luma20 LED Light Strip** Single Color 10 Feet- Standard Density IP30 Waterproof UL-Listed

- Can be cut and reconnected every three LEDs
- Comes with our new 3M mounting tape twice as strong as before!
- Dimmable with HitLights LED Dimmable Driver or EZDim.
- 6 Year Warranty

SKU: L2012V-301-1030-U

PRODUCT SKU	INPUT	OUTPUT Lumens per Foot	COLOR TEMPERATURE	POWER REQUIREMENTS Watts per Foot	Strip Width	LEDs	CERTIFICATION
L2012V-402-1030-U	12V	477-507 lm/ft	3000K Warm White 4000 Neutral White 5000K Cool White	5.6 Watts/ft	10 mm	360 per 10 foot roll	UL-Listed
L2012V-301-1030-U	12V	300-330 lm/ft	3000K Warm White 4000 Neutral White 5000K Cool White	2.8 Watts/ft	10 mm	180 per 10 foot roll	UL-Listed



HIGH DENSITY **Premium Luma20 (2835) 'WAVE' LED Light Strip** Single Color 10 Feet - High Density IP30 Indoor Use UL-Listed

- Comes with our new 3M mounting tape twice as strong as before!
- Can be cut and reconnected every three LEDs
- Dimmable with HitLights LED Dimmable Driver or EZDim
- 2 Year Warranty

SKU: L2012V-651-1630-U-W

PRODUCT SKU	INPUT	OUTPUT Lumens per Foot	COLOR TEMPERATURE	POWER REQUIREMENTS Watts per Foot	Strip Width	LEDs	CERTIFICATION
L2012V-651-1630-U-W	12V	400 lm/ft	6500 Very Cool White	2.8 Watts/ft	8 mm	300 per 10 foot roll	UL-Listed

### Luma10 RGB Multicolor



HIGH DENSITY

#### Premium Luma10 (5050) LED Light Strip RGB Multicolor

Single Color 16.4 Feet - High Density IP30 Indoor Use

**UL-Listed** 

- Our high-Density strip has twice as many LEDs and is twice as bright as the Standard Density strip
- RGB controllable with compatible RGB controller
- Can be cut and reconnected every three LEDs
- IP-30 (Indoor)
- 6 Year Warranty

PRODUCT SKU	INPUT	OUTPUT Lumens per Foot	COLOR TEMPERATURE	POWER REQUIREMENTS Watts per Foot	strip Width	LEDs	CERTIFICATION
L1012V-MC2-1630-U	12V		6500 Very Cool White	3.4 Watts/ft	10 mm	300 per 16.4 foot roll	UL-Listed

### Luma10 RGB Multicolor



HIGH DENSITY **Premium RGBW 12V Luma10 LED Light Strip** Single Color 16.4 Feet IP30 Indoor Use UL-Listed

- Can be cut and reconnected every three LEDs
- Come with included 3M adhesive backing for easy application
- IP-30 Indoor
- 2 Year Warranty

SKU: L1012V-RGBW2-1630-U-C

PRODUCT SKU	INPUT	OUTPUT Lumens per Foot	COLOR TEMPERATURE	POWER REQUIREMENTS Watts per Foot	strip Width	LEDs	CERTIFICATION
L1012V-RGBW2-1630-U-C	12V		6500 Very Cool White	4.4 Watts/ft	12 mm	300 per spool	UL-Listed

#### 24 Watt DC Power Supply 12V

- Easy plug and play installation
- UL-Listed
- 6 Year Warranty

110V AC to 12V DC Transformers - Driver for LED Tape Light and Other Low Voltage Devices. UL-Listed. Plug and Play, no wiring.

SKU: PWR-12V-024-30-U





#### 60 Watt DC Power Supply 12 Volt

- Easy plug and play installation
- UL-Listed
- 6 Year Warranty

110V AC to 12V DC Transformers - Driver for LED Tape Light and Other Low Voltage Devices. UL-Listed. Plug and Play, no wiring.

SKU: PWR-12V-060-30-U

PRODUCT SKU	INPUT	OUTPUT	DIMENSIONS	CERTIFICATION
PWR-12V-024-30-U	110V-240V AC Direct wall plug - standard North American NEMA 1	12V DC / 24 Watts (2 Amps) Four foot output cable with 5.5 x 2.1 mm DC jack	86 x 48 x 33 mm (3-3/8 x 1-7/8 x 1-5/16 inches)	UL-Listed
PWR-12V-024-60-U	110V-240V AC Direct wall plug with five foot input cable - standard North American NEMA 1	12V DC / 60 Watts (5 Amps) Four foot output cable with 5.5 x 2.1 mm DC jack	33 x 120 x 50 mm (1-5/16 x 4-3/4 x 2 inches)	UL-Listed

#### 96 Watt DC Power Supply 12 Volt

- Easy plug and play installation
- UL-Listed
- 6 Year Warranty

110V AC to 12V DC Transformers - Driver for LED Tape Light and Other Low Voltage Devices. UL-Listed. Plug and Play, no wiring.

SKU: PWR-12V-096-30-U



PRODUCT SKU	INPUT	OUTPUT	DIMENSIONS	CERTIFICATION
PWR-12V-096-30-U	110V-240V AC Direct wall plug - standard North American NEMA 1	12V DC with 5.5 x 2.1 mm DC jack	153 x 59 x 39 mm (6-7/16 x 2-5/16 x 1- 9/16 inches)	UL-Listed



#### 60 Watt DC Power Supply 24 Volt

- Easy plug and play installation
- UL-Listed
- 3 Year Warranty
- 60Watts / 2.5 Amps / 24 Volts DCT

110V AC to 12V DC Transformers - Driver for LED Tape Light and Other Low Voltage Devices. UL-Listed. Plug and Play, no wiring.

SKU: PWR-24V-060-30-U

PRODUCT SKU	INPUT	OUTPUT	DIMENSIONS	CERTIFICATION
PWR-24V-060-30-U	110V-240V AC Direct wall plug - standard North American NEMA 1	24V DC / 60 Watts (2.5 Amps) Four foot output cable with 5.5 x 2.1 mm DC jack	33 x 120 x 50 mm 1-5/16 x 4-3/4 x 2 inches	UL-Listed

#### 150 Watt DC Power Supply High Output 12 Volt

- Multiple outputs for powering large systems
- 5 year warranty
- UL-Listedt

These adapters are ideal for large scale projects and have multiple outputs, so allowing you to supply power to several locations or LED strips. They're available in various power ratings, from 150 Watts to 348 Watts.

SKU: PWR-12V-150-30-U





#### 350 Watts DC Power Supply High Output - 12 Volt

- Multiple outputs for powering large systems
- 6 year warranty
- UL-Listed
- 348 Watts / 29 Amps / 12 Volts DC

110V AC to 12V DC Transformers - Driver for LED Tape Light and Other Low Voltage Devices. 150 watts. Hardwired.

PWR-12V-350-30-U

PRODUCT SKU	INPUT	OUTPUT	DIMENSIONS	CERTIFICATION
PWR-12V-150-30-U	110V or 240V AC Direct wall plug - standard North American NEMA 1	12V DC, 150 Watts	199 x 98 x 38 mm (7-3/16 x 3-7/8 x 1-7/16 inches)	UL-Listed
PWR-12V-350-30-U	110V or 240V AC Direct wall plug - standard North American NEMA 1	2V DC, 348 Watts	215 x 115 x 50 mm (8-7/16 x 4-1/2 x 2 inches)	UL-Listed

### **M-SERIES DIMMABLE DRIVER 12V**



40 WATT

60 WATT

100 WATT



150 WATT



300 WATT

PRODUCT SKU	INPUT	OUTPUT	DIMENSIONS	CERTIFICATION
40 Watt M-Series Dimmable Driver 12V SKU: PWR-12V-040-30-D	120V AC	12V DC, 40 Watts (3.3 Amps)	51 x 142 x 54mm (2 x 5-9/16 x 2-1/8 inches	ETL-Listed
60 Watt M-Series Dimmable Driver 12V SKU: PWR-12V-060-30-D	120V AC	12V DC, 60 Watts (5 Amps)	57 x 166 x 65mm (2-1/4 x 6-9/16 x 29/16 inches)	ETL-Listed
100 Watt M-Series Dimmable Driver 12V SKU: PWR-12V-100-30-D	120V AC	12V DC, 100 Watts (12.5 Amps)	72 x 256 x 79mm (2-3/4 x 10 x 3 inches)	ETL-Listed
150 Watt M-Series Dimmable Driver 12V SKU: PWR-12V-150-30-D	120V AC	12V DC, 150 Watts (12.5 Amps)	76 x 249 x 76mm (2-15/16 x 9-7/8 x 2-15/16 inches)	ETL-Listed
300 Watt M-Series Dimmable Driver 12V SKU: PWR-12V-300-30-D	120V AC	12V DC, 300 Watts (25 Amps)	89 x 249 x 107mm (3-1/2 x 9-7/8 x 4-3/16 inches)	ETL-Listed

### **M-SERIES DIMMABLE DRIVER 24V**





60 WATT



150 WATT



300 WATT

PRODUCT SKU	INPUT	OUTPUT	DIMENSIONS	CERTIFICATION
40 Watt M-Series Dimmable Driver SKU: PWR-24V-040-30-D	120V AC	24V DC, 40 Watts (1.7 Amps)	51 x 142 x 54mm (2 x 5-9/16 x 2-1/8 inches)	ETL-Listed
60 Watt M-Series Dimmable Driver SKU: PWR-24V-060-30-D	120V AC	24V DC, 60 Watts (2.5 Amps)	57 x 166 x 65mm (2-1/4 x 6-9/16 x 29/16 inches)	ETL-Listed
150 Watt M-Series Dimmable Driver SKU: PWR-24V-150-30-D	120V AC	24V DC, 150 Watts (6.25 Amps)	76 x 249 x 76mm (2-15/16 x 9-7/8 x 2-15/16 inches)	ETL-Listed
300 Watt M-Series Dimmable Driver SKU: PWR-24V-300-30-D	120V AC	24V DC, 300 Watts (12.5 Amps)	89 x 249 x 107mm (3-1/2 x 9-7/8 x 4-3/16 inches)	ETL-Listed



#### 40 Watt E-Series Dimmable Driver Waterproof, Electronic, 12 Volt

- Control the brightness of your LED light strips with a wall dimmer
- Compatible with all single color 12V LED light strips
- Rated IP-67 (Waterproof)
- ETL-Listed
- 5 Year Warranty

SKU: PWR-12V-040-67-D

#### 60 Watt E-Series Dimmable Driver Waterproof, Electronic, 12 Volt

- Control the brightness of your LED light strips with a wall dimmer
- Compatible with all single color 12V LED light strips
- Rated IP-67 (Waterproof)
- ETL-Listed
- 5 Year Warranty

SKU: PWR-12V-060-67-D

PRODUCT SKU	INPUT	OUTPUT	DIMENSIONS	CERTIFICATION
PWR-12V-040-67-D	120V AC	12V DC 40 Watts (3.3 Amps)	20 x 125 x 50mm 13/16 x 4-15/16 x 2 inches	ETL-Listed
PWR-12V-060-67-D	120V AC	12V DC, 60 Watts (5 Amps)	20 x 125 x 50mm 13/16 x 4-15/16 x 2 inches	ETL-Listed

#### 25 Watt U-Series Dimmable Driver Universal 12 Volt

- Control the brightness of your LED light strips with a wall dimmer
- Compatible with all single color 12V LED light strips
- 25 Watts / 2 Amps / 12 Volts DC
- ETL-Listed
- 2 Year Warranty

110V AC-12V DC Dimmable Transformer - Compatible w/ Lutron & Leviton For Kitchens, Cabinets, Bedrooms & More. Hardwired. 25 watts.

Compatible Lutron dimmers including Ariadni, Vareo, Nova, Ceana, Diva, Gyder, Lyneo, Nova T and Skylark

Compatible Leviton dimmers include Mural, SureSlide, ToggleTouch and Vizia





#### 36 Watt S-Series Dimmable Driver Electronic 12 Volt

- Control the brightness of your LED light strips with a wall dimmer
- Compatible with all single color 12V LED light strips
- UL-Listed
- 5 Year Warranty

110V AC-12V DC Dimmable Transformer - Compatible w/ Lutron & Leviton For Kitchens, Cabinets, Bedrooms & More. Hardwired.

Compatible Lutron dimmers include Ariadni, Vareo, Nova, Ceana, Diva, Gyder, Lyneo, Nova T and Skylark

Compatible Leviton dimmers include Mural, SureSlide, ToggleTouch and Vizia

SKU: PWR-12V-040-67-D

PRODUCT SKU	INPUT	OUTPUT	DIMENSIONS	CERTIFICATION
PWR-12V-024-30-D	120V AC	12V DC	154 x 54 x 19 mm 6-1/16 x 2-1/16 x 13/16 inches	ETL-Listed
PWR-12V-040-67-D	120V AC	12V DC, 36 Watts (3 Amps)	10.2 x 1.2 x 0.7 inches)	UL-Listed



#### 96W LED Dimmable Driver 12V

- UL listed
- 6-Year Warranty
- One of the safest 24V dimmable LED drivers out there

Safe to install and mount - This 96W Dimmable driver comes with a 4.9ft AC cord and a 3.2ft DC cord. It has a great balance of power, making it easier to adjust as needed.

SKU: PWR-G24V-096-66-U-D-JH

PRODUCT SKU	INPUT	OUTPUT Lumens per Foot	COLOR TEMPERATURE	POWER REQUIREMENTS Watts per Foot	strip Width	LEDs	CERTIFICATION
L1012V-RGBW2-1630-U-C	12V		6500 Very Cool White	4.4 Watts/ft	12 mm	300 per spool	UL-Listed

#### 40 Watt EK-Series Dimmable Driver (Knockout version) Waterproof 12 Volt

- Control the brightness of your LED light strips with a wall dimmer
- Compatible with all single color 12V LED light strips
- Rated IP-67 (Waterproof)
- Includes knockouts for safe connection UL-Listed
- 6 Year Warranty

These NEW drivers include knockouts in the enclosure so you can make all your connections internal to the driver, keeping your project safe and to code!

SKU: PWR-12V-040-67-D-K0





#### 60 Watt EK-Series Dimmable Driver (Knockout version) Waterproof 12 Volt

- Control the brightness of your LED light strips with a wall dimmer
- Compatible with all single color 12V LED light strips
- Rated IP-67 (Waterproof)
- Includes knockouts for safe connection UL-Listed
- 6 Year Warranty

These NEW drivers include knockouts in the enclosure so you can make all your connections internal to the driver, keeping your project safe and to code!

SKU:

PRODUCT SKU	INPUT	OUTPUT	DIMENSIONS	CERTIFICATION
PWR-12V-040-67-D-K0	120V AC	12V DC, 40 Watts (3.3 Amps)	32 x 172 x 68mm (1.26 x 6.77 x 2.67 inches)	UL-Listed
PWR-12V-060-67-D-KO	120V AC	12V DC, 60 Watts (5 Amps)	32 x 172 x 68mm (1.26 x 6.77 x 2.67 inches)	UL-Listed

### HitLights Driver and Dimmer Switch



#### 12 Volt EZDim<sup>®</sup> Driver and Dimmer Switch 60 Watt

- Simplifies your LED installation
- Eliminates compatibility issues between drivers and switches
- Superior LED dimming performance (100% 1%)
- Preset dimmer with on/off switch
- 6 Year Warranty

SKU: SWX-12V-040-30-U

#### 12 Volt EZDim<sup>®</sup> Driver and Dimmer Switch 40 Watt

- Simplifies your LED installation
- Eliminates compatibility issues between drivers and switches
- Superior LED dimming performance (100% 1%)
- Preset dimmer with on/off switch
- 6 Year Warranty

SKU: SWX-12V-060-30-U

EZDim® combines an LED dimmer switch and low-voltage LED power supply into a single integrated unit. The EZDim Dimmer + Driver accepts 120 VAC and converts it to low-voltage DC, all within a standard electrical box. With power options up to 100W, it is a true evolutionary step forward for power and control of LED applications.

PRODUCT SKU	INPUT	OUTPUT	DIMENSIONS	CERTIFICATION
SWX-12V-040-30-U	120V AC	12V DC, 40 Watts (3.3 Amps)	1.4 x 2.1 x 4.1 Inches	FCC UL-Listed
SWX-12V-060-30-U	120V AC	12V DC, 60 Watts (5 Amps)	1.4 x 2.1 x 4.1 Inches	FCC UL-Listed

### HitLights Driver and Dimmer Switch



#### 24 Volt EZDim® Driver and Dimmer Switch 60 Watt

- Simplifies your LED installation
- Eliminates compatibility issues between drivers and switches
- Superior LED dimming performance (100% 1%)
- Preset dimmer with on/off switch
- 6 Year Warranty

SKU: SWX-24V-060-30-U

#### 24 Volt EZDim<sup>®</sup> Driver and Dimmer Switch 100 Watt

- Simplifies your LED installation
- Eliminates compatibility issues between drivers and switches
- Superior LED dimming performance (100% 1%)
- Preset dimmer with on/off switch
- 6 Year Warranty

SKU: SWX-24V-100-30-U

EZDim® combines an LED dimmer switch and low-voltage LED power supply into a single integrated unit. The EZDim Dimmer + Driver accepts 120 VAC and converts it to low-voltage DC, all within a standard electrical box. With power options up to 100W, it is a true evolutionary step forward for power and control of LED applications.

PRODUCT SKU	INPUT	OUTPUT	DIMENSIONS	CERTIFICATION
SWX-24V-060-30-U	120V AC	24V DC, 60 Watts (2.5 Amps)	1.4 x 2.1 x 4.1 Inches	FCC UL-Listed
SWX-24V-100-30-U	120V AC	24V DC, 100 Watts (4.1 Amps)	1.4 x 2.1 x 4.1 Inches	FCC UL-Listed

#### R110 Mini Single Color Remote Dimmer RF Remote

- Remote Control with On/Off, Speed, Brightness, and Mode settings.
- Easy DC Jack Plugin
- 1 Year HitLights Warranty
- Working Voltage: DC 5-24V
- White Brightness Grade: 10 Levels
- PWM Frequency: 1KHz
- PWM Physical Grade: 256 Steps
- Overheat Protection: Yes
- Remote Frequency: 433.92MHz
- Remote Control Distance: >15m at an open area
- Power Off Memory: Yes, restores to the previous set mode when turned on
- Housing: Tubed for standard, ABS+Silicon for -H Version

SKU: CTR-SC-R110Mini





#### M-SERIES RGB/RGBW Multicolor LED Light Strip Control System

- Compatible with RGBW
- Includes remote and receiver
- 5 Year Warrantyt

SKU: CTR-RGBW-M8

PRODUCT SKU	INPUT	OUTPUT	DIMENSIONS	CERTIFICATION
CON-10M-B00A-12PK			Controller Dimension: 50x15x7mm	
CON-085-B00F-4PK				

#### DC Jack Splitter - 4 Way

- Maximum current of 3 Amps
- Weight: 38g
- Jack-side cable is 22AWG. Plug side cables are 24AWG.

For connecting or extending power wires and other DC accessories.

SKU: CDC-4YSPL



PRODUCT SKU	INPUT	OUTPUT	DIMENSIONS	CERTIFICATION
CDC-4YSPL			Total Length: 302mm / 11.875" Splitter cable length: 95.25mm / 3.75" Max Width: 38mm / 1.5"	
CDC-M002-4PK				

#### LED Arm Lights

- Connectable LED Arm Lights
- 100 LEDs deliver smooth even light with no hot spots
- 12V 21W
- LED type: 5630
- Conversion efficiency: 85%
- Working temperature:-20 ~50

SKU: ARM110V-65050-021-BLK





#### 12V DC LED Arm Light

- 1000 Lumens
- UL-Listed
- 6 Year Warranty

Smooth and even lighting for displaying artwork or entrances, perfect for task creation areas where high lighting is beneficial.


SKU: ARM12V-60160-012-BLK-2PK

PRODUCT SKU	INPUT	OUTPUT	DIMENSIONS	CERTIFICATION
ARM110V-65050-021-BLK	AC100-240V	3600 Lumens, Constant Current: 600mA		UL-Listed
ARM12V-60160-012-BLK-2PK	12V DC 12 watts	1000 Lumens 6500K		CE UL-Listed SAA approved

#### 8mm Single Color 3528 6 Inch Any Angle Strip to Strip Connector

- Gauge: 22 AWG
- Length: 6 inches
- Internal Width: 8 mm (compatible with any 2-pin strips)

SKU: CON-08S-B00A-4PK/12PK

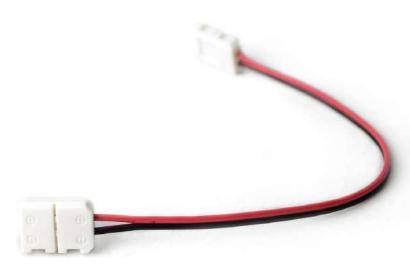



#### 8mm Solderless LED Light Strip Connectors and Extensions : Single Color

Maximum current of 3 Amps

ur 8mm single color LED light strip connectors are a simple, ustration-free solution for all of our LED light strip connection nd extension needs. These solderless connectors install with simple clasp attachment, meaning that you can achieve a safe and secure connection without any tools.

SKU: CON-08S-B00F-4PK

PRODUCT SKU	INPUT	OUTPUT	DIMENSIONS	CERTIFICATION
CON-085-B00A-4PK/12PK			13.5 x 12.5 x 5 mm (5/8 x 1/2 x 3/16 inches)	
CON-08S-B00F-4PK				


#### 10mm (5050) Solderless LED Light Strip Connectors and Extensions RGB Multicolor 6 Inch Any Angle

Maximum current of 3 Amps

These solderless connectors install with a simple clasp attachment, meaning that you can achieve a safe and secure connection without any tools.

SKU: CON-08S-B00A-4PK/12PK





#### 10mm (5050) Solderless LED Light Strip Connectors and Extensions : Single Color

Maximum current of 3 Amps

Solderless connections for LED Strip Light & Tape Light in Kitchens, Cabinets, Shelving & More. Multiple length and connection options.

SKU: CON-08S-B00F-4PK

PRODUCT SKU	INPUT	OUTPUT	DIMENSIONS	CERTIFICATION
CON-10M-B00A-12PK				
CON-085-B00F-4PK				

### 

### FACTORY DIRECT LED STRIP LIGHTS & SUPPLIES

WE OWN OUR FACTORY	NO MIDDLEMEN
DESIGNED IN LOUISIANA	EASY TECHNICAL SUPPORT FOR COMPLEX PROJECTS
PROFESSIONAL QUALITY LED STRIP LIGHTS & SUPPLIES FOR PROFESSIONALS	24/7 ORDERING
S50 CREDIT ON FIRST ORDER DVER \$400	DEDICATED ACCOUNT MANAGERS FOR PROFESSIONALS

### LEARN MORE ABOUT LED LIGHTING

How to design an LED light strip system How much light do I need? Choosing the Right Color Temperature How to connect a dimmable driver UL-Listing - What it means to you 12 Volt vs 24 Volt LED Strip Lighting : What's the difference? What is voltage drop? Why are my strips dimmer at the end? How to use LED Light Strips to Illuminate Acrylic Lettering and Signage

Frequently asked questions

### CONTACT US

<u>1 (855) 768-4135</u>

<u>www.hitlights.com</u> <u>HitLights for Pros</u> HitLights OEM Customization

We consider ourselves a full service LED lighting PARTNER, not just a supplier