



rippleSHIELD UNIFIT S9053WP - 9W




Dimmable 9 watt LED module, with rippleSHIELD flicker control technology

Application

Ideal for any residential or commercial interior spaces where nuisance ripple induced flicker is visible

Design Specifications

- Combined with the SAL SDD400SFI rippleSHIELD dimmer, the rippleSHIELD Unifit series eliminates nuisance ripple induced flicker between 750-1050Hz once and for all, typically found in the QLD and NSW regions. In addition, it has been found to be enormously successful in eliminating LED flicker in off-grid supply environments.
- High output LED optics, warm white 3000K CCT and CRI>80, ideal for residential environments
- Changeable multi-faceted reflector system, 60° standard beam, optional 25° and 40°.
- A comprehensive range of downlight trims available to suit any interior residential lighting design, see model numbers
- Remote constant current rippleSHIELD trailing edge dimmable LED driver, with smooth dimming performance to 1.0% of light output, designed with flex and plug for easy installation.
- Need more info.....slide to the FAQ's below

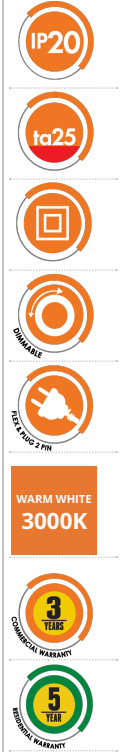








Performance

- Dimmable - **YES**
- Dimmer Type - **dim only with SDD400SFI**



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
	S9053WP/SFI	240	9	700	3000	60
	S9008WW/WH/SFI	240	9	700	3000	60
	S9008WW/BK/SFI	240	9	700	3000	60
	S9009WW/WH/SFI	240	9	700	3000	60
	S9009WW/BK/SFI	240	9	700	3000	60
	S9011WW/WH/SFI	240	9	700	3000	60
	S9011WW/BK/SFI	240	9	700	3000	60


Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)
YES	80			50	60(H)
YES	80	MATT WHITE	76	82	80(H)
YES	80	MATT BLACK	76	82	80(H)
YES	80	MATT WHITE	76	82	80(H)
YES	80	MATT BLACK	76	82	80(H)
YES	80	MATT WHITE	92	102	95(H)
YES	80	MATT BLACK	92	102	95(H)

Patent pending

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

s9053

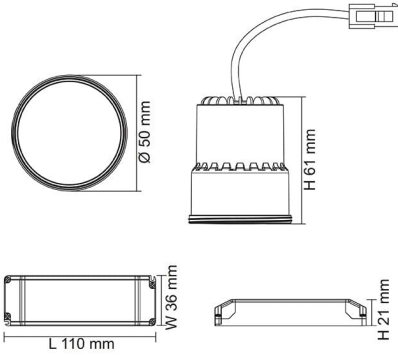

THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
ECO GEM SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

