




MAXILED XMW40

40 Watts / 5560 Lumens / 90+ CRI




Square wide beam symmetrical LED downlight range featuring four individual COB LEDs in a square trim design. Available in 2700K, 3000K, 4000K and 5000K colour temperature options in 90+ CRI or 2700K, 3000K and 4000K VIVID options. Large passive heatsink provides effective thermal management ensuring high output and long lifespan. Supplied with remote driver.

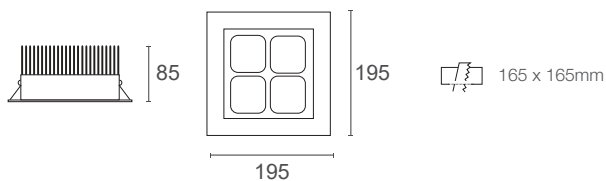

System Power	46.7W	Cut-Out	165 x 165mm
LED Power	42W	Weight	1870g
IP Rating	IP20		

	2700K	3000K	4000K	5000K	VIVID	2700K	3000K	4000K
COB Lumen Output	5200 lm	5340 lm	5560 lm	5640 lm	VIVID	4320 lm	4480 lm	4600 lm
Total Luminous Flux	4178 lm	4290 lm	4467 lm	4531 lm		3471 lm	3599 lm	3696 lm

Efficacy	95.65 lm/W 4000K Wide Beam	Lifetime	50,000hrs (L80)
Dimming	Optional: Dali		
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit
		Power Factor	> 0.95

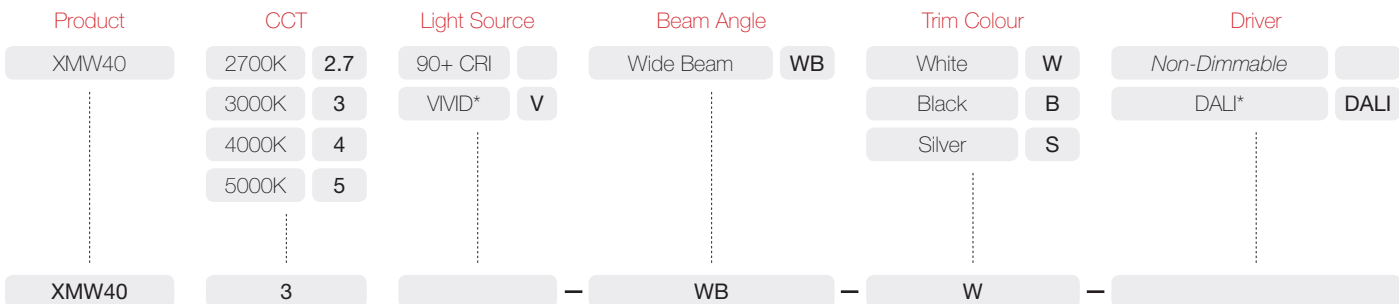

XMW403-WB-W

* Optional



TREND
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au