




MAXILED XMW60

60 Watts / 7470 Lumens / 90+ CRI




Square wide beam symmetrical LED downlight range featuring four individual COB LEDs in a square trim design. Available in 2700K, 3000K, 4000K and 5000K colour temperature options in 90+ CRI or 2700K, 3000K and 4000K VIVID options. Large passive heatsink provides effective thermal management ensuring high output and long lifespan. Supplied with remote driver.

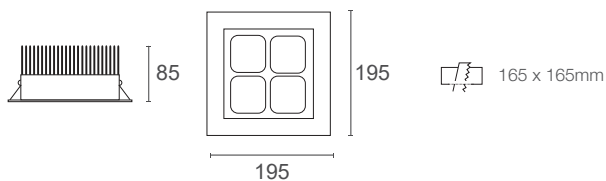

System Power	61.5W	Cut-Out	165 x 165mm
LED Power	57W	Weight	1870g
IP Rating	IP20		

	2700K	3000K	4000K	5000K	VIVID	2700K	3000K	4000K
COB Lumen Output	7050 lm	7220 lm	7470 lm	7560 lm	VIVID	6040 lm	6230 lm	6360 lm
Total Luminous Flux	5744 lm	5822 lm	6086 lm	6159 lm		4921 lm	5076 lm	5182 lm

Efficacy	98.96 lm/W 4000K Wide Beam	Lifetime	50,000hrs (L80)
Dimming	Optional: Dali		
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit
		Power Factor	> 0.95

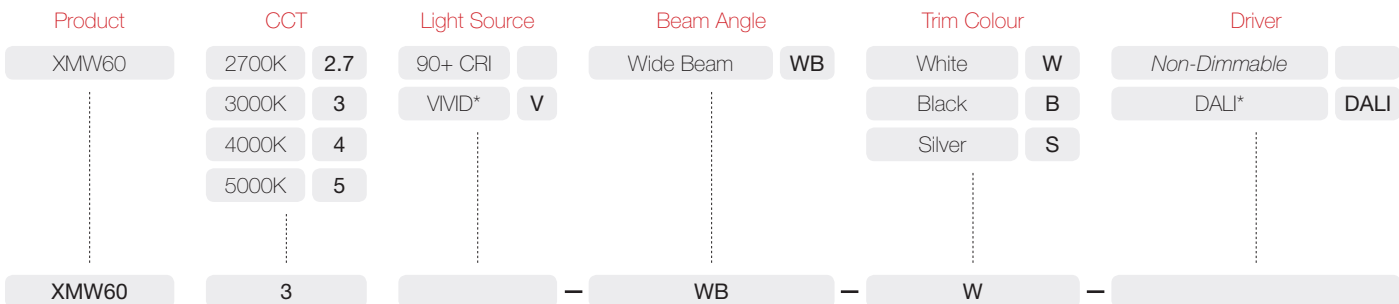

XMW603-WB-W

* Optional



TREND
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au