




LED SPOT XTF25

25 Watts / 3325 Lumens / 90+ CRI

Track mounted LED spotlight with integral driver and three circuit track adaptor. Manufactured with a single 25W LED with a high CRI of 90+ and high COB lumen outputs of 3045 lm (3000K) and 3325 lm (4000K). Collimator lens with 20° to 70° adjustable beam angle provides smooth even light distribution while allowing for easy and accurate light control. Fully adjustable design with 350° rotation and 90° tilt allowing for directional adjustment in a variety of lighting applications.

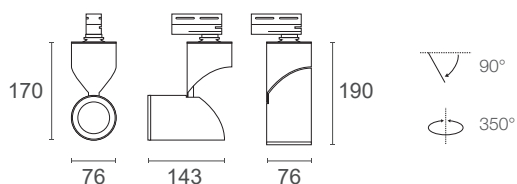

System Power 28.9W

LED Power 25W

IP Rating IP20


Tilt-Angle 90°

Rotation 350°

Weight 1025g

	3000K	4000K
COB Lumen Output	3045 lm	3325 lm
Total Luminous Flux	2070 lm	2145 lm

Efficacy	74.2 lm/W 4000K	Lifetime	50,000hrs (L80)		
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit	Power Factor	> 0.95

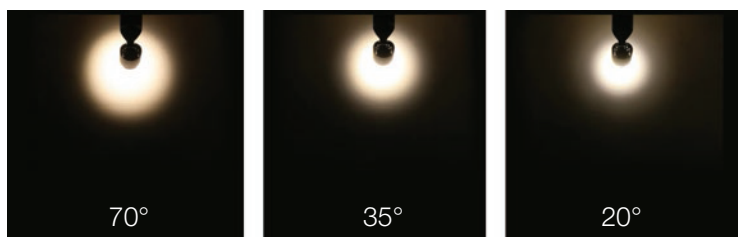

Adjustable focus lens design allows for beam angle adjustments from 20° to 70°



Rotatable front ring adjusts beam angles

Product	CCT	Light Source	Beam Angle	Trim Colour
XTF25	3000K 3 4000K 4	90+ CRI	Adjustable	White W Black B
XTF25	3			W

XTF253-W



TREND
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020

Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au