



PATCO® 5565FR
FR Aircraft Removable Surface
Protection Tape


APPLICATIONS

- Aircraft general surface protection applications on various surfaces during general maintenance within aircraft interiors.

FEATURES & BENEFITS

- Abrasion, moisture, and solvent resistant
- Flame retardant - meets FAR 25.853(a)
- Removes cleanly - will not leave residue on most surfaces
- Available with or without 6" perforations for easy tear.
- Conformable and easy to apply
- Available in widths 1/4" - 54" x 108'

CONSTRUCTION

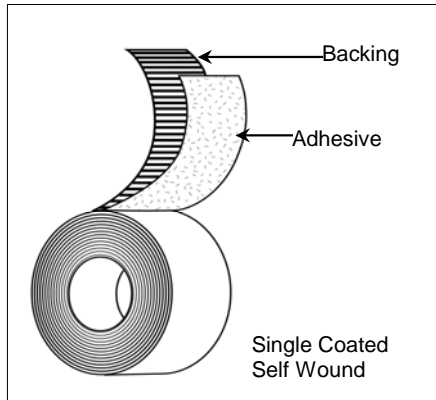

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Low Density Polyethylene

Adhesive:

- Acrylic

Colors:

- Transparent Orange

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	5.5 mils	0.140 mm	PSTC-133
Substrate Thickness	4.5 mils	0.114 mm	PSTC-133
Adhesion to Steel	13 oz./in.	0.142 N/mm	ASTM D-3330
Tensile Strength	11 lb./in.	1.926 N/mm	ASTM D-3759
Elongation (%)	400 %		
Application Temperature Range	50°F to 120 °F	10°C to 49°C	
Operating Temperature Range	-40°F to 190°F	-40°C to 88°C	

Disclaimer: Patco 5565FR will protect a very wide variety of aircraft surfaces and will typically remove residue free from many surfaces. Due to the wide variety of aircraft surfaces that may potentially require protective films, Berry Plastics highly recommends testing this product prior to use on non-critical areas or test parts prior to actual use to determine compatibility and the limits of residue free removal. Berry Plastics makes no claims for universal residue free removal, and may not be held liable for adhesive residue on parts that were not pre-tested.

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.