

The Super Janet's remarkable design and solid construction in cast aluminum and heavy stamped steel make it the heroine in any commercial or residential space. Moving air with barely a whisper, its efficient DC motor turns solid wood blades in walnut, matte black, matte white, or barn wood tones. An ecoconscious LED light kit with light cover completes the package. Sophisticated, efficient and green, Super Janet carries a limited lifetime warranty.

Product Features























SUPER JANET

FINISH AND BLADE OPTIONS		
SKU#	SJ-XX-XXX-XX (Model+Finish+Blade+Dia	ameter)
Standard Finishes	Brushed Nickel Gloss White Matte Black Textured Bronze	BN WH BK TB
New Blade Finishes	Barn Wood Tone Matte Black Matte White Walnut Tone	BW BK MWH WA
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60
TECHNICAL SPECS		

TECHNICAL SPECS		
Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152	
Overall Drop	12 inches/30 cm +downrod length	
Fan Weight	17 lbs	
Downrods Lengths Field cuttable. Non- threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Voltage	110 (Contact us for 220 conversion)	
Motor Type	DC	
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible	
Ambience	Silent	
Safety Certification	ETL / CETL	
Warranty	Limited Lifetime	

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA 42 inch / 52 inch / 60 inch / Fan Diameter 107 cm* 132 cm* 152 cm RPM (Low / High) 50 / 242 50 / 150 50 / 184 CFM (Low/High) 915 / 4530 1571 / 5962 2293 / 6495 Watts (High) 23.62 32.99 33.32 CFM/Watt (High) 191.75 194.93 180.72

15°

15°

LIGHT KIT PHOTOMETRICS		
Lamping (Replaceable)	Integrated LED	
Remote Dimmable	Yes	
Delivered Temperature in K	2776	
Delivered Lumens	419	
CRI	94	
Watts	18	
Hours	50,000	

Light kit longevity if used 6 Hours/Day: 22.8 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm

Vaulted ceiling canopy for up to 30°

Black 6-speed RF remote control with reverse

Blade Pitch 15°



White wireless Decora-style, 6-speed, wall control




NOTE: Only compatible with included controllers.

*Unipack Shipping for 42 in and 52 in diameters only.

Super Janet

TECHNICAL SPECIFICATIONS

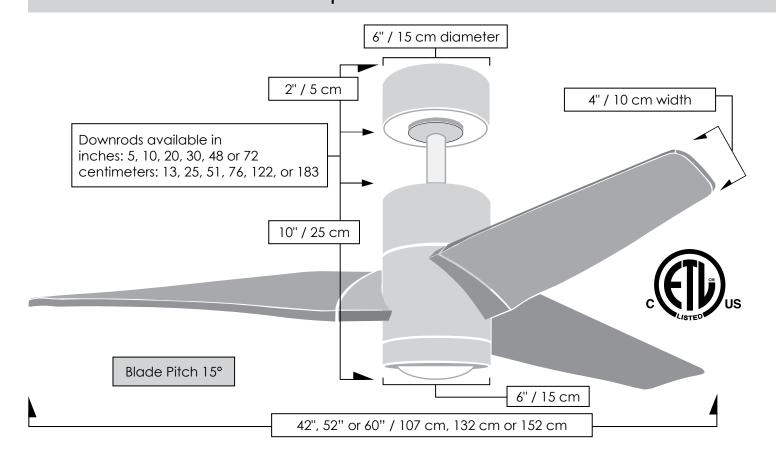

CEILING PITCH TABLE		
0/12	0 degrees	
1/12	4.76 degrees	
2/12	9.46 degrees	
3/12	14.04 degrees	
4/12	18.43 degrees	
5/12	22.62 degrees	
6/12	26.57 degrees	
7/12	30.26 degrees	
8/12	33.69 degrees	
9/12	36.87 degrees	
10/12	39.81 degrees	
11/12	42.51 degrees	

CEILING HEIGHT / DOWNROD TABLE		
Ceiling Height	Downrod Lengths Field cuttable. Non-threaded	
10 ft or less	5 inches / 13 cm Use safety cages if applicable	
10 -12 feet	10 inches / 25 cm	
13 feet	20 inches / 51 cm	
14 feet	30 inches / 76 cm	
15 feet	48 inches / 122 cm	
16 feet +	72 inches / 183 cm	

Matthews Fan Company

1881 Industrial Drive Libertyville, IL 60048 Tele: 847.680.9043 Fax: 847.680.8140 www.matthewsfanco.com

