




Benefits

- Simple push action on AR111 featured with Dual Beam Technology (DBT) can shape the light spot of the lamp from a narrow beam 24° to a wider beam angle 45°
- Ideal replacement for traditional LED AR111 reflector 75W with DBT technology, which increases functionality and flexibility in a variety of settings.
- Compatible with most leading-edge and trailing-edge dimmers
- Extremely long lifetime of 40,000 hours

Application




Model	Item Description	W	PF	lm	lm/W	CRI	Beam	Life
ER205115/dm/db-2800K	PROV1 AR111 11.5W G53 2800K DIM DBT	11.5	0.8	1000/1050	86 / 91	>80	24°/45°	40000
ER205115/dm/db-4000K	PROV1 AR111 11.5W G53 4000K DIM DBT	11.5	0.8	1000/1050	86 / 91	>80	24°/45°	40000

Single Box Dimensions (LxWxH)mm	Outer Box Dimensions (LxWxH)mm	Packing Qty (PCS/CTN)
125*134*75	418*407*307	30
125*134*75	418*407*307	30


Application Conditions	
IP	IP20
Operating Temperature	-20~40°C
Application Temperature	25°C
Storage Environment	-25~50°C

Mechanical Properties	
Optical Material	PC
Housing Material	PC
Finishing Colour	Silver

Electrical Supply	
Frequency (Hz)	50/60
Voltage (V)	12V
AC/DC	AC

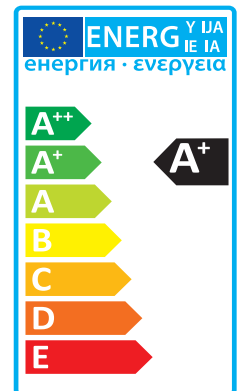

Dimensional Drawing



ER205115/dm/db