

EmLED-12NM (B) / EmLED-14NM (B)

EASI LED RECESSED EMERGENCY LIGHT

Features and Benefits

- Compact all-in-one, self-contained LED emergency light designed for easy and quick recessed installation on ceiling.
- Includes an optional large ring adapter.
- Suitable for various indoor environments such as retail, commercial, hospitality and healthcare industries.
- LED lamps provide high efficiency, durability and low energy consumption.




EmLED-12NM (B)
EmLED-14NM (B)

EmLED-12NM (B)
with large ring adapter
EmLED-14NM (B)
with large ring adapter



Technical Data

Mode of Operation	Non-maintained
Lamp	Samsung 2W/4W High flux white LED
Operating Temperature	ta 0°C ~ 50°C
Mains Supply	230V AC 50Hz/60Hz
Power Consumption	EmLED-12NM (B): < 1W EmLED-14NM (B): < 2W
Battery	EmLED-12NM (B): Ni-Cd battery EmLED-14NM (B): Ni-MH battery
Charger	Fully automatic
Charging Monitor	Green LED
Recharge Period	24 hours
Testing Facility	Test-switch for independent testing
Emergency Duration	3 hours
Safety Feature	Low-voltage cut-off to prevent over-discharge of battery
Construction	Injection moulded fire retardant polycarbonate
Weight (Nett/Gross)	EmLED-12NM (B): 0.20 kg / 0.28 kg EmLED-14NM (B): 0.28 kg / 0.34 kg
Compliance	SS 563-1:2010 SS 563-2:2010/A1:2013 SS IEC 60598-2-22:2016 SS IEC 60598-1:2016
Installation	Recessed mount
IP Rating	IP20
Warranty	1 year

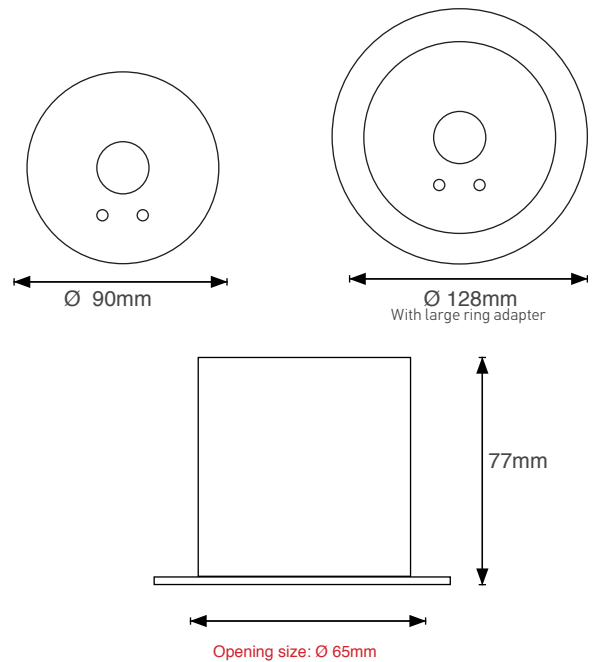

Ordering Information

MODEL	LAMP
EmLED-12NM (B)	Samsung 2W High flux white LED
EmLED-14NM (B)	Samsung 4W High flux white LED