




P.O. Box 68323, Bryanston 2021
200 Cussonia Park, 3 Ridge Road,
Laser Park, Honeydew, South Africa.
Tel: (011) 794-6311 • Fax: (011) 794-6233



HOLD ALL KIT

(Holds square shaped items in place on the rack)

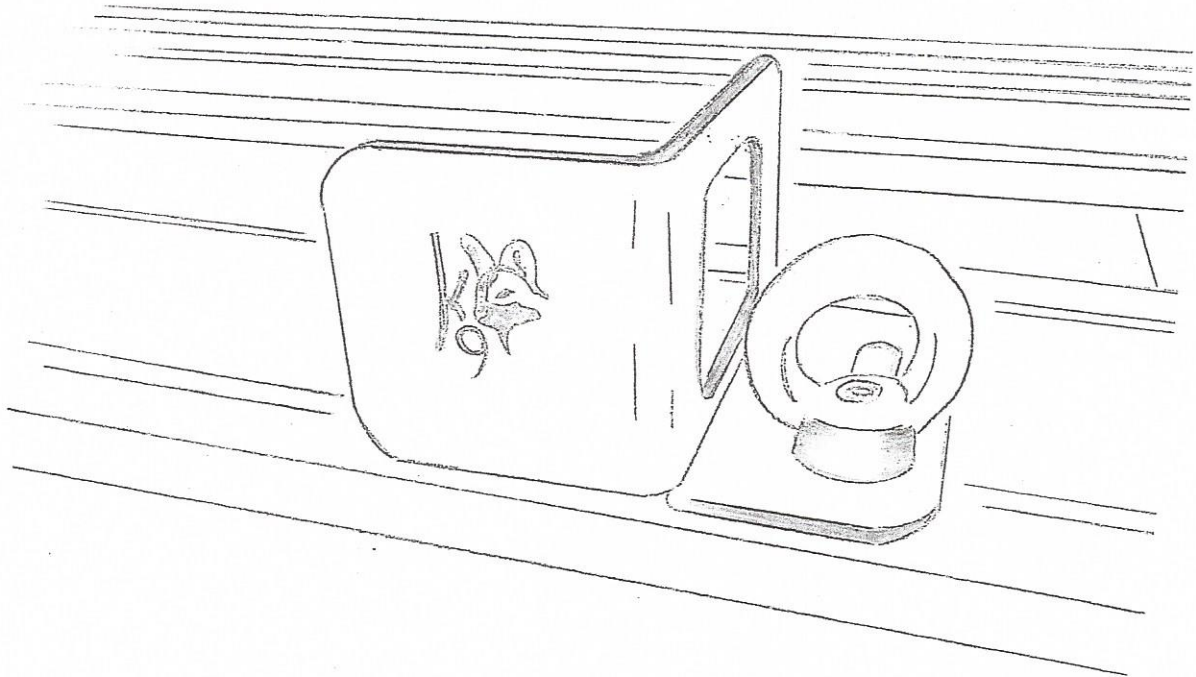


INSTALLATION WARNING:

1. It is important that all K9 Racks and accessories are correctly attached (fastened) and secured to your vehicle.
2. Negligent installation of the K9 Rack and accessories could lead to an unfortunate vehicle accident. Furthermore injury and cause bodily harm or even lead to the demise of other folk.
3. Remember you are personally responsible in securing and checking the installation of your K9 Rack on your vehicle.
4. Once fitted the K9 Rack installation should be checked on a regular basis and if need be adjusted or secured.
5. Before you commence installation of your K9 Rack it is imperative that you read the instructions thoroughly to understand and be prepared for the assembly.
6. Should you not fully understand the assembly and installation instructions of the K9 Rack and you are apprehensive that you do not have the technical or mechanical know-how it would be in your interest to have the K9 Rack installed by a qualified professional at a garage or fitment centre.
7. Lastly it is extremely important that your equipment including the weight of the K9 Rack does not exceed your vehicles maximum roof load specifications.
8. In order to obtain your vehicle specifications one would need to contact your vehicle manufacturer or distributor or look in your service book provided with your vehicle.




GETTING STARTED


Pliers
Scissors
Lighter

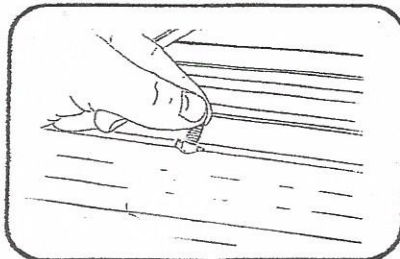


Slide bolt provided in k9 rack slats.

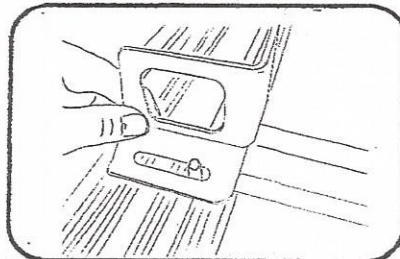


Start with one corner kit and place into position.

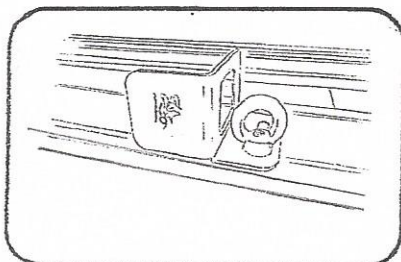


Thread eye nut onto bolt.

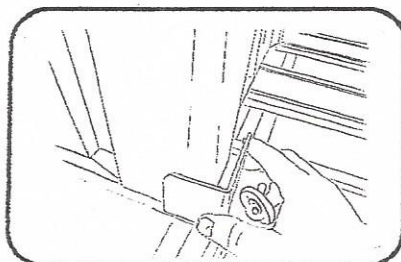


Place box (NOT SUPPLIED WITH) into require position and adjust kit tight up against box. Repeat on all four corners

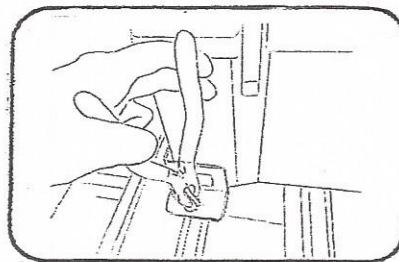


Tighten eye nuts with pliers once placed.

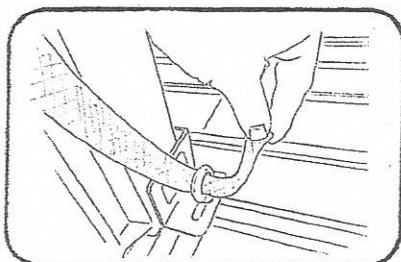


Thread ratchet strap through eye nuts strap must go diagonally across the box In order to secure in place.

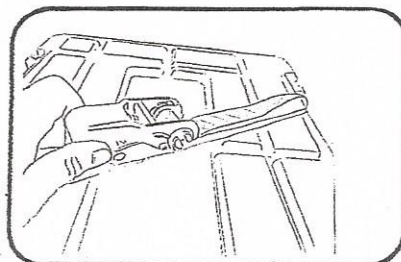


Tighten ratchet strap

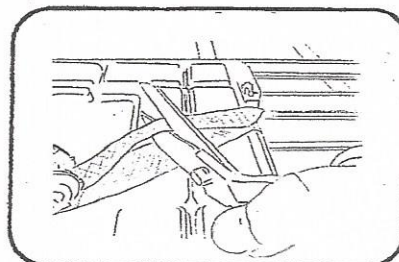

Should the strap be too long for the box (NOT SUPPLIED WITH) it can be cut with a pair of scissors

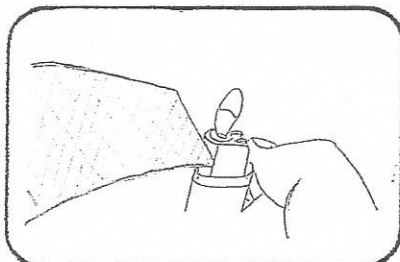

After cutting burn edge with lighter or simillar to stop fraying.

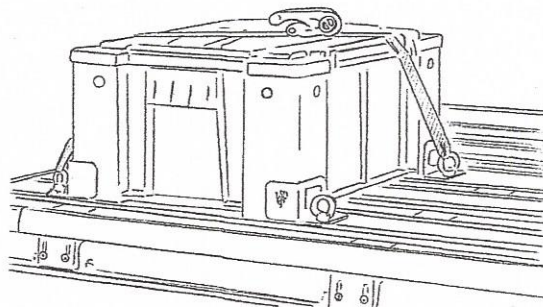

JOB WELL DONE!!