

Tenda




All for better networking.

TEF1226P-24-440W

24-Port 10/100Mbps + 2 Gigabit Web Smart PoE Switch

www.tenda.com.cn

Link More

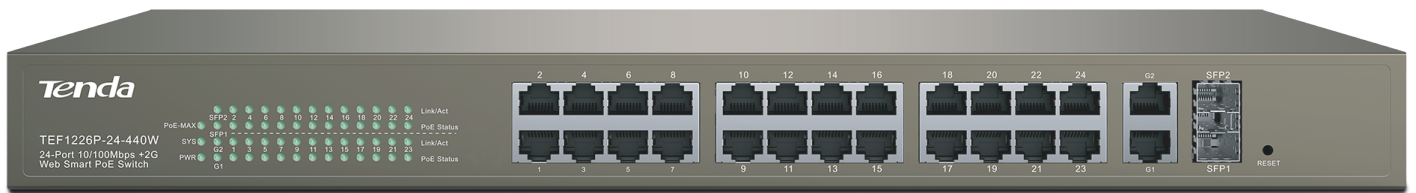

TEF1226P-24-440W

24-Port 10/100Mbps + 2 Gigabit Web Smart PoE Switch

Products Description

TEF1226P-24-440W is a 24-Port 10/100Mbps +2-Port Gigabit TP/SFP Combo Web Smart PoE Switch developed by Tenda. It provides 24 10/100Base-TX RJ45 ports, 2 10/100/1000Base-T RJ45 ports and 2 1000Base-X SFP combos.

Ports 1-24 support IEEE 802.3af PoE (15.4W) and IEEE 802.3at PoE+ (30W) powering. The whole PoE output is 370W. By using Cat 5 twisted pair, the device can provide data and power for

APs, IP cameras, IP phones, and other PoE devices. Moreover, by using Cat 5e Ethernet and enabling extend mode, the transmission distance of data and power can be as long as 250 meters. In addition, it supports QVLAN, link aggregation, QoS, MAC binding, etc, which saves the cost, time and energy of network deployment to a great extent.

Key Feature

- 24 10/100Base-TX RJ45 ports, 2 10/100/1000Base-T RJ45 ports and 2 100/1000Base-X SFP combos
- Powerful port management functions, including port mirroring, speed limit, trunk, etc
- Supports IEEE 802.3Q Tag VLAN
- 24 10/100Base-TX RJ45 ports support PoE power supply. The total power output is up to 370W and the maximum output of a single port is 40W
- Supports Web, SNMP management and network diagnostics maintenance methods

250 Meters Transmission

With 8-pin and the professional network extension technology, the transmission distance of power and data can be up to 250 meters, which can work in place of network extender or some optical fiber to expand the network without additional cost



Outstanding PoE Power Supply

Ports 1-24 support IEEE 802.3at and IEEE 802.3af PoE standard. It provides 40W maximum PoE output a single port and 370W the whole device, which can power the high-power device. Various interface types (1000Mbps RJ45 ports, SFP uplink ports and 10/100Mbps PoE ports) meet the 100M and 1Gbit Ethernet transition seamlessly.

Reliability and Security

It provides PSE short-circuiting protection, PoE overloading, power over temperature, over voltage and surge current protection. And professional 6Kv lightning protection protects the device from thunder strike.

Application

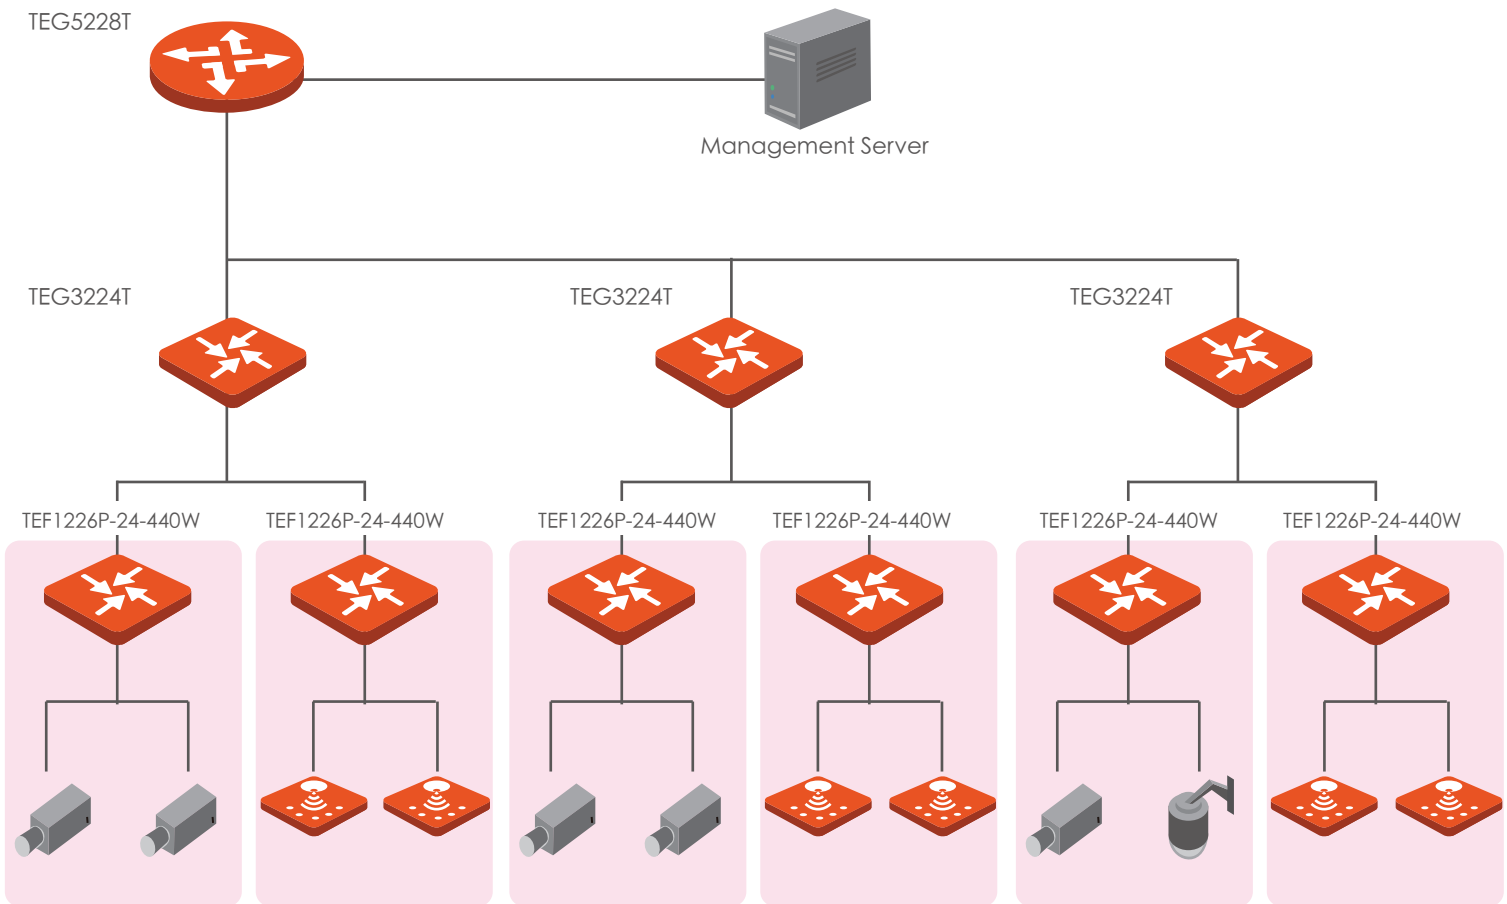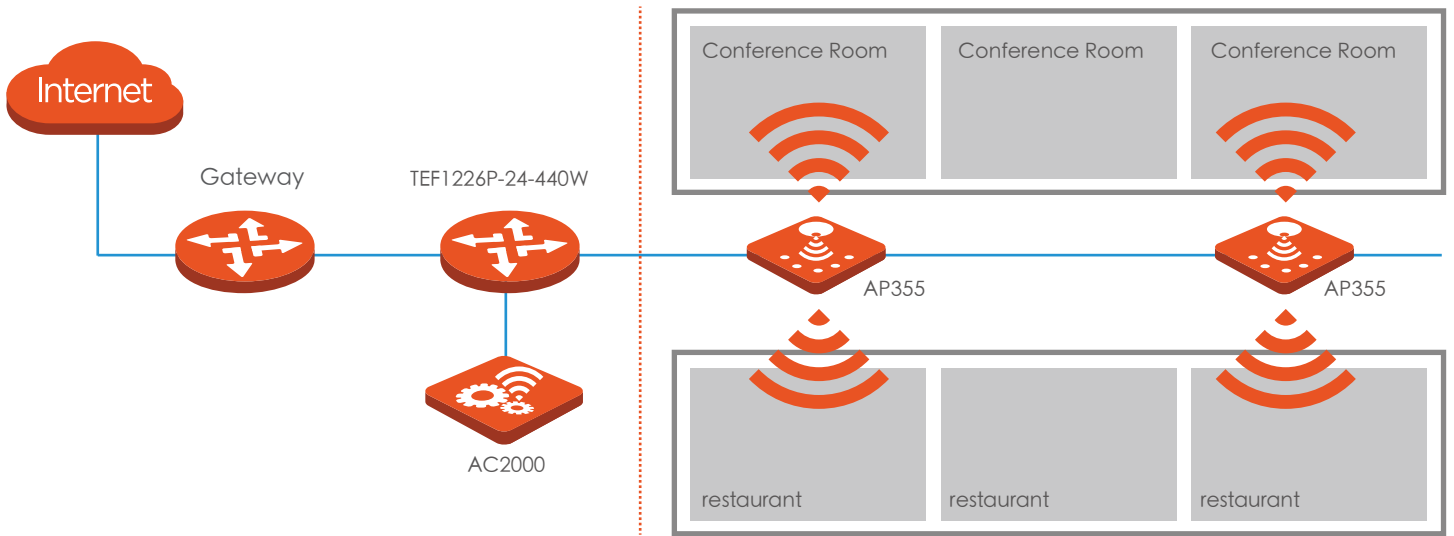

Product Model TEF1226P-24-440W

Hardware Features

| | | |
|---------------------------|--|-------------------------------|
| Standards&Protocols | IEEE 802.3、 IEEE 802.3u、 IEEE 802.3z、 IEEE 802.3ab、 IEEE 802.3x、 IEEE 802.1D、 IEEE 802.1W、 IEEE 802.1Q、 IEEE 802.3af、 IEEE 802.3at | |
| Switching capacity | 8.8 Gbps | |
| Throughput | 6.5Mpps | |
| Dimensions (W × D × H) | 440mm*284mm*44mm | |
| MTBF | ≥ 100,000 hours(about 11 years) | |
| Interfaces | 24 10/100Mbps RJ45 Ports(Data/PoE) 2 10/100/1000Mbps RJ45 Ports(Data) 2 100/1000Mbps SFP Slot(Data) (Auto Negotiation/Auto MDI/MDIX) | |
| Port lightning protection | ≥6KV | |
| Wire-speed forwarding | Support | |
| Capacity | Forwarding mode | Store-forward and cut-through |
| | Mac Address Table | 4K |
| PoE Supply | Port 1 to Port 24 support standard IEEE802.3at/af power (maximum power for each port is 38W) , PoE power type is end-span(12+, 36- and 45+, 78- line pair) | |
| Input Voltage | AC: 100-240V~ 50/60Hz | |
| Power consumption | in full configuration: <440W Power Supply: 370W | |
| Environment | Operating Temperature: 0°C~40°C (32°F~104°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing | |

Software Features

| | |
|----------------------------|--|
| PoE management | Support over temperature protection for PoE module Support graphical management, detection of PD equipment |
| VLAN | Supports up to 18 VLAN IDs Port VLAN Supports up to 31 VLAN IDs 802.1Q VLAN |
| Security | MAC-Port Binding |
| Link aggregation | Static Trunk Supports 3 groups of 4-Port trunk support |
| STP | STP/RSTP |
| IGMP Snooping | IGMP (v1/v2) Snooping |
| Port Mirroring | N: 1 port mirroring |
| QoS | 802.1p and DSCP priority re-marking Flow control Flexible queue scheduling algorithm can be set based on port and queue, support SP, WRR, |
| Firmware upgrade | Upgrade via the Web |
| Management and maintenance | Support SNMP v1/v2 and WEB-based management |
| Certification | FCC、 CE、 RoHS |

SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Tenda Technology Bldg.Int' IE-City,
#1001 Zhong Shan Yuan Rd.,Nanshan District,Shenzhen China.

E-mail:tenda@tenda.com.cn

Tel:0755-2765 7098

Fax:0755-2765 7178

PC:518055