
TRU

TRUABUTMENT

SOLUTION

ONE & ONLY TRUSOLUTION

THIS IS IT. WE ARE TRU.

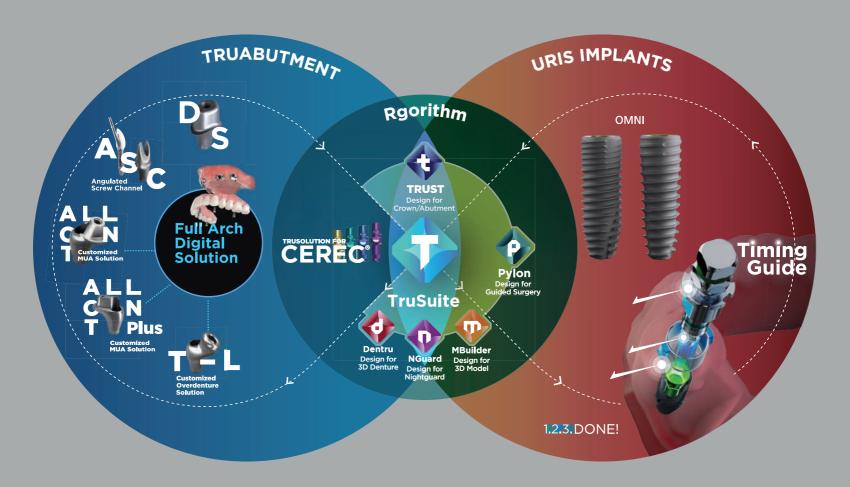













TRUST Design for Crown/Abutment





PYLON Design for Guided Surgery



- Free treatment planning software for several
- Free exports of the designed surgical guide



Dentru

Design for 3D Denture





MBuilder

Ti-Base

Design for 3D Model





NGuard

Design for Nightguard



URIS IMPLANTS



Implantology made Simple








Thread Design




Apex Design

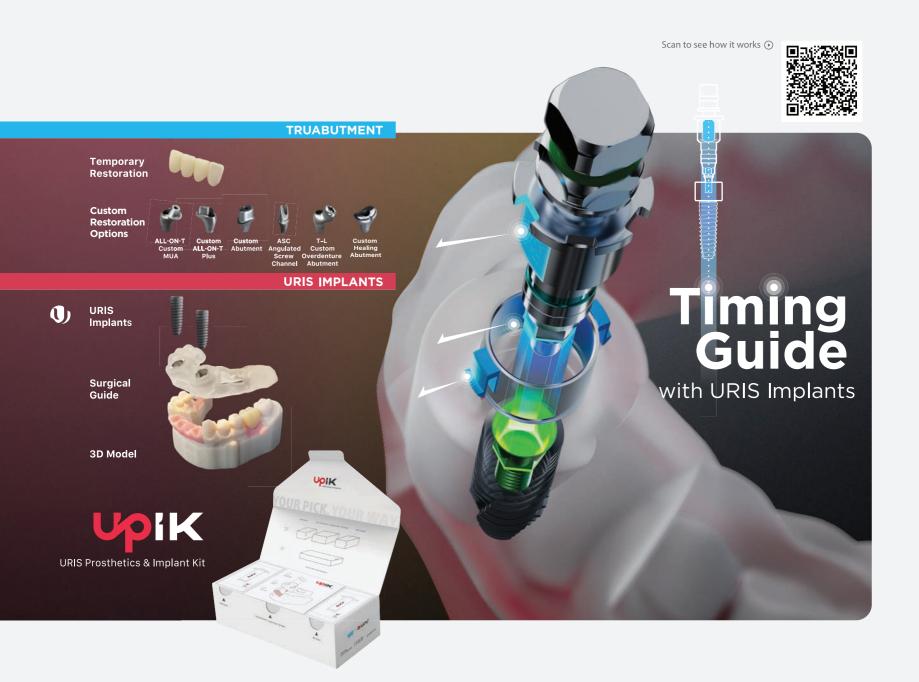

MODEL-LESS WORKFLOW

6 STEPS

TruAbutment Workflow

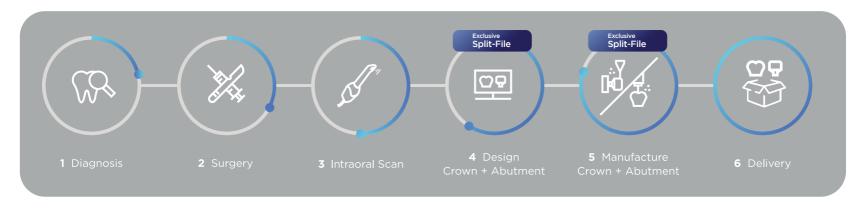

11 STEPS Conventional Workflow







A Swiss CNC machine stands out from conventional types due to its unique headstock movement. Unlike traditional CNC machines where the workpiece remains stationary while the tool operates, a Swiss-type turning center allows the workpiece to move along the Z-axis while keeping the tool fixed. This setup enables smooth guidance of the bar into the tooling area using a specialized guide bushing, which accurately positions the bar during machining. As a result, the headstock performs precise back-and-forth motions along the Z-direction, advancing the bar seamlessly.

The guide bushing plays a vital role in Swiss CNC machining and is considered a fundamental component of the process. When external forces act on an object, they tend to deflect. However, in Swiss CNC machines, the guide bushing provides close support to the workpiece near the cutting tools, minimizing deflection caused by cutting forces. This arrangement significantly enhances machining accuracy and consistency, crucial for achieving desired outcomes in advanced manufacturing applications.

Our products incorporate cutting-edge technology, ensuring exceptional precision in machining operations. With an impressive accuracy level of less than 5 micrometers, we guarantee minimal errors in the final output. This high degree of precision is achieved through advanced manufacturing techniques and meticulous calibration, making our product ideal for industries with strict dimensional requirements. Whether in aerospace, automotive, or medical applications, our products consistently deliver outstanding results with minimal room for error.

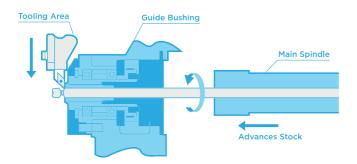

SWISS-TYPE CNC MILLING MACHINE







FULL ARCH SOLUTION

ANGULATED SCREW CHANNEL

Easy & Safe Delivery Every Time. Esthetics & Functionality Combined.

Place the screw access channel anywhere on bridge and hybrid restorations to effortlessly correct angulation issues. You may angulate the access hole up to 25 degrees. TruAbutment ASC screwdriver and screws are uniquely designed for easy access and safe delivery. One complimentary ratchet driver provided with every ASC abutment order.



FULL ARCH SOLUTION

AOT/T-L

Completely Customized. Completely Stabilized.

Experience the Full Arch Solution with TruAbutment's AOT for multi-unit abutment solution and T-L for customized overdenture solution.

Tailor-made emergence profile, height, and stable fitting are all achievable through patient-specific abutments.

These two solutions allow you to simplify complex procedures by obtaining desired angulation and creating the ideal tissue support. You can now offer the gold standard of custom abutments for edentulous patients. It's time to go beyond limitations with TruAbutment.




FULL ARCH SOLUTION

AOT PLUS

Raising the Bar for Custom MUA Restoration.

AOT Plus enhances your custom MUA restoration options by providing more surface area for support with a bigger screw that can be torqued up to 25 N•cm.

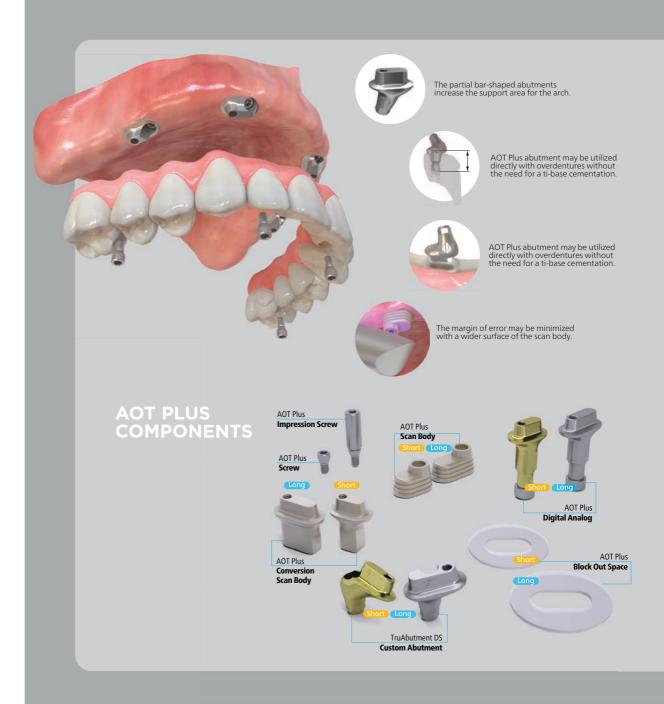

DS

One Action. Two Results.

Expect no surprises and save production time by scanning your case only once to produce both the final crown and the abutment from one design file. All TruAbutment DS custom abutments come with 2 screws and a lifetime warranty.







No Manual Polishing Necessary



No Milling Disc



No Pre-milled



TRUSOLUTION FOR CEREC®

Adding More to Your Everyday.

TruScan Post

Available in 4 different gingival heights, this allows for flexibility to scan any implants at various placement. A single patient scan with TruScan Post will open up restorative options for both a SCRP crown with a TruBase or a full custom abutment.



Patient Tissue

TRUSCAN POST SELECTION

Recommended

based on patient tissue height

Height	Scan Post Height
2mm	GH1
3mm	GH1 - GH2
4mm	GH2 - GH3
5mm	GH3 - GH4
6mm	GH4



All trademarks, trade names, and company names displayed on this page are the property of their respective owners. TruAbutment is not affiliated with, sponsored by, or endorsed by compatible product manufacturers. TruAbutment does not sponsor, endorse, or offer any warranty for their products or services.

COMPONENTS

Digital Prosthetic Options at Its Best.


TruAbutment components offer all you need and more.

- Scanbody
- TruBase (Ti-base)
- Digital Lab Analog
- Lab Analog
- Drivers



TRU PRODUCTS

PRODUCT COMPATIBILITIES

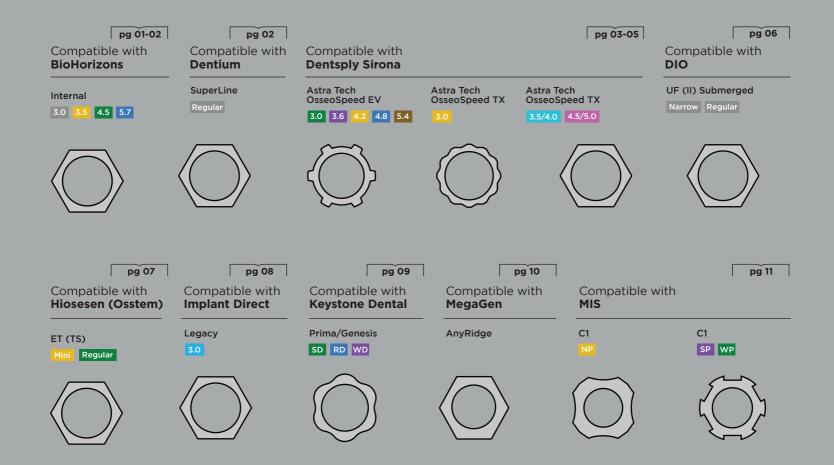

PRODUCT COMPATIBILITIES



STRAIGHT ALL-ON-T/T-L & COMPONENTS

All-on-T Components

All-on	-T Base	Scan Body	Digital Lab Anal	og / Lab Analog	Temporary Abutment
4.35mm	7.35mm				12mm
TruBase Short available in 1.25 Hex (AOT-BSSH) and Unigrip Screw (AOT-BSSU)	TruBase Long available in 1.25 Hex (AOT-BSLH) and Unigrip Screw (AOT-BSLU)	Scan Body available in 1.25 Hex (AOT-SBH) and Unigrip Screw (AOT-SBU)	CMM-ATDLA Digital Lab Analog	CMM-ATLA Lab Analog	Temporary Abutment available in 1.25 Hex (CMM -ATTAH) and Unigrip Screw (CMM-ATTAU)


Straight All-on-T & T-L

	1mm	2mm	3mm	Driver
All-on-T Straight			V	CMM-ATSDI3
T-L Straight	Treases	Tourse	Toppoor	TLC-TLSD13

Straight All-on-T & T-L Service List

	Cmpatible with	
Manufacturer	Brand	Recommended Torque Value
Dentium	SuperLine	30N-Cm
	Astra Tech™ OsseoSpeed® EV3.0	25N-Cm
Dentsply -	Astra Tech™ OsseoSpeed® EV3.6	25N-Cm
Sirona	Astra Tech™ OsseoSpeed® EV4.2	25N-Cm
_	Astra Tech™ OsseoSpeed® EV4.8	25N-Cm
_	Astra Tech™ OsseoSpeed® EV5.4	25N-Cm
Hiossen	Hiossen ET (Osstem ET) Mini	20N-Cm
(Osstem)	Hiossen ET (Osstem ET) Regular	30N-Cm
Implant Direct	Legacy 3.0	25N-Cm
MegaGen	AnyRidge	30N-Cm
Neodent	GM	25N-Cm
	NobelActive 3.0	15N-Cm
Nobel Biocare	NobelActive NP	35N-Cm
Nobel Blocare	NobelActive RP	35N-Cm
	NobelActive WP	35N-Cm
	BLX RB	35N-Cm
Straumann	Bone Level SC	25N-Cm
	Bone Level NC	35N-Cm
	Bone Level RC	35N-Cm
URIS -	Omni Narrow	20N-Cm
UKIS	Omni Regular	30N-Cm
	Eztetic 3.1	30N-Cm
	TSV 3.5	30N-Cm
Zimmer Biomet	TSV 4.5	30N-Cm
	TSV 5.7	30N-Cm

ASC Drivers

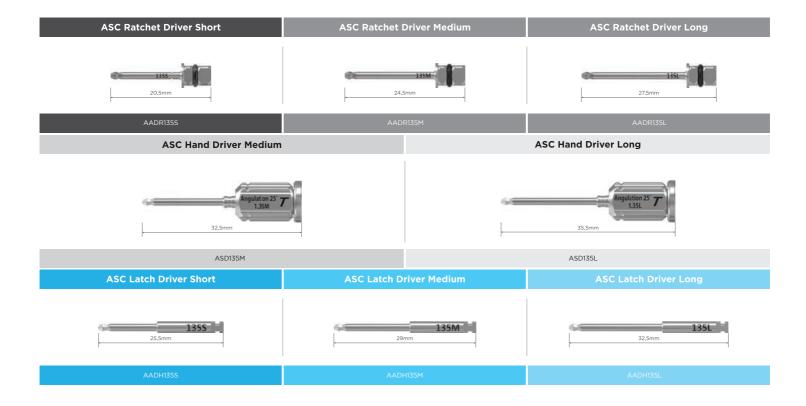

ASC Torque Wrench




TW40

ASC-KIT



ASC01

2-way Drivers

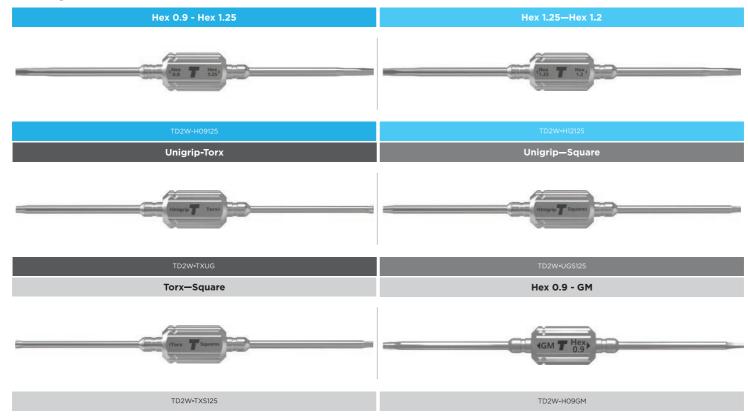

BioHorizons

Brand	Platform		TruB	ase	TruScan	TruLab	TruDigital		Screw	
Drailu	Color/Size		3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
Internal	3.0	Engaging	3.8 BHN-B13S	3.8 BHN-B15S	10.3	11	12	W	W	Y
Common Torque ASC Torque : 25 AOT Plus Torque Screw Driver : H	N•Cm e:30N•Cm	Non-Engaging	3.8 	3.8 BHN-B15B	BHN-SB	BHN-LA	BHN-DLA	BHN-CW	BHN-AW	BHN-BS
Internal	3.5	Engaging	H35-B13S	4.0 BH35-B15S	10	, J	12			
Common Torque ASC Torque : 25 AOT Plus Torque Screw Driver : H	N•Cm e:30N•Cm	Non-Engaging	4.0 	H35-B15B	BH35-SB	BH35-LA	BH35-DLA	-	-	yp.
Internal	4.5	Engaging	4.5 4.5 BH45-B13S	4.5 BH45-B15S	9.8	11	12	BH35-CW	BH35-AW	BHN-BS
Common Torque ASC Torque : 25 AOT Plus Torque Screw Driver : H	N•Cm e:30N•Cm	Non-Engaging	4.5 BH45-BI3B	H45-B15B	BH45-SB	BH45-LA	BH45-DLA			

Compatible with **BioHorizons**

Internal Common Torque: 25N AOT Plus Torque: Screw Driver: Her	Platform	TruB	ase	TruScan	TruLab	TruDigital		Screw	
Braild	Color/Size	3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
Internal	5.7	5.7 5.7 BH57-B13S	BH57-B15S	9.8	11	12			ï
ASC Torque : 25 AOT Plus Torque	N•Cm e:30N•Cm	5.7 5.7 BH57-BI3B	BH57-B15B	BH57-SB	BH57-LA	BH57-DLA	BH35-CW	BH35-AW	BHN-BS

Compatible with **Dentium**

SuperLine Common Torque: ASC Torque: 2SN-	Platform	TruB	ase	TruScan	TruLab TruDigital		Screw		
Brailu	Color/Size	3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
SuperLine	Regular	DSU-B13S	DSU-B15S	10.3	11	12	-		
	N•Cm ex 1.25mm	Non-Engaging	DSU-B15B	DSU-SB	DSUO-LA	DSU-DLA	DSU-CW	DSU-AW	DSU-BS


Brand	Platform		TruBa	ase	TruScan	TruLab	TruDigital		Screw	
Brand	Color/Size		3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
Astra Tech OsseoSpeed EV	3.0	Engaging	3.5 AE30-B13S	3.5 AE30-B15S	10.5		12	W	W	4
Common Torque ASC Torque : 25h AOT Plus Torque Screw Driver : He	N•Cm e: 25N•Cm	Non-Engaging	AE30-B13B	AE30-B15B	AE30-SB	AE30-LA	AE30-DLA	AE30-CW	AE30-AW	AE30-BS
Astra Tech OsseoSpeed EV	3.6	Engaging	AE36-BI3S	AE36-BI5S	10.5		12	VD	VP	9
Common Torque ASC Torque : 25N AOT Plus Torque Screw Driver : He	N•Cm e: 25N•Cm	Non-Engaging	4.0 AE36-BI3B	AE36-B15B	AE36-SB	AE36-LA	AE36-DLA	AE36-CW	AE36-AW	AE36-BS
Astra Tech OsseoSpeed EV	4.2	Engaging	4.5 AE42-BI3S	AE42-B15S	10.3	11	13	9	(0	9
Common Torque ASC Torque: 25N AOT Plus Torque Screw Driver: He	N•Cm e: 25N•Cm	Non-Engaging	4.5 AE42-BI3B	4.5 AE42-B15B	AE42-SB	AE42-LA	AE42-DLA	AE42-CW	AE42-AW	AE42-BS

Dentsply Sirona

Brand	Platform		TruBa	ise	TruScan	TruLab	TruDigital		Screw	
Brand	Color/Size	3.	.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
Astra Tech OsseoSpeed EV	4.8	Engaging	4.95 48-B13S	AE48-B15S	10.3	11	13			
Common Torque ASC Torque : 25N AOT Plus Torque Screw Driver : He	N•Cm :: 25N•Cm	Non-Engagin	4.95 48-B13B	AE48-B15B	AE48-SB	AE48-LA	AE48-DLA			(0
Astra Tech OsseoSpeed EV	5.4	Engaging	5.4 54-B13S	AE54-B15S	10.3	11	13	AE48-CW	AE48-AW	AE48-BS
Common Torque ASC Torque : 25 AOT Plus Torque Screw Driver : He	N•Cm :: 25N•Cm	Non-Engagin	5.4 54-B13B	AE54-B15B	AE54-SB	AE54-LA	AE54-DLA			

Dentsply Sirona

Durand	Platform		TruB	ase	TruScan	TruLab	TruDigital		Screw	
Brand	Color/Size		3.5mm	5.5mm	Body	TruLab Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
Astra Tech OsseoSpeed TX	3.0	Engaging	3.5	3.5	10.5	11	12	Y	•	1
Common Torque ASC Torque : 15N Screw Driver : He AOT Plus : Unava	I•Cm ex 1.25mm		AS3-B13S	AS3-B15S	AS3-SB	AS3-LA	AS3-DLA	AS3-CW	AS3-AW	AS3-BS
Astra Tech OsseoSpeed TX	3.5 4.0	Engaging	4.0	4.0	10.3	11	12	4	•	
Common Torque ASC Torque : 20N Screw Driver : He AOT Plus : Unava	N•Cm ex 1.25mm		AS4-B13S	AS4-B15S	AS4-SB	AS4-LA	AS4-DLA	AS4-CW	AS4-AW	AS4-BS
Astra Tech OsseoSpeed TX	4.5 5.0	Engaging	4.6	4.6	10.3	11	14.5			
Common Torque ASC Torque : 25N Screw Driver : He AOT Plus : Unava	N•Cm ex 1.25mm		AS5-B13S	AS5-B15S	AS5-SB	AS5-LA	AS5-DLA	AS5-CW	AS5-AW	AS5-BS

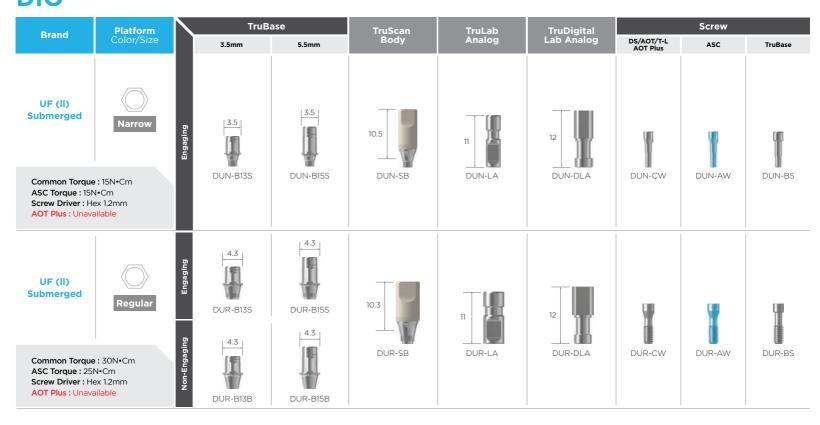

Hiossen (Ossetem)

	Platform	Tru	Base	Truscan	Twulab	TruDigital		Screw	
Brand	Color/Size	3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
ES (TS)	Mini	OTM-B13S	OTM-B15S	10.5	11	12		¶	
Common Torque ASC Torque : 20 AOT Plus Torque Screw Driver : H	N•Cm e : 20N•Cm	OTM-BI3B	OTM-B15B	S.5mm Body Analog Lab Analog DS/AOT/T-L ASC 4.0	OTM-BS				
ES (TS)	Regular	OTR-BI3S	OTR-B15S	10.3	11	12			
Common Torque ASC Torque : 25 AOT Plus Torque Screw Driver : H	N•Cm e : 30N•Cm	01 4.3 02 OTR-B13B	OTR-B15B	OTR-SB	OTR-LA	OTR-DLA	OTR-CW	OTR-AW	OTR-BS

Implant Direct

Brand	Platform	TruB	ase	TruScan	TruLab	TruDigital		Screw	
Dialiu	Color/Size	3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
Legacy	3.0	DL30-B13S	3.5 IDL30-B15S	9.9	11	12	1		
Common Torque ASC Torque: 25 Screw Driver: H	e : 25N•Cm iN•Cm lex 1.25mm ailable	3.5 3.5 10L30-B13B	IDL30-B15B	IDL30-SB	IDL30-LA	IDL30-DLA	IDL30-CW	IDL30-AW	IDL30-BS

Brand	Platform	TruBase		TruScan Body	TruLab Analog	TruDigital	Screw		
Brand	Color/Size	3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
Prima/ Genesis	SD	3.8	3.8	10.3	11	12			
Common Torque ASC Torque : 251 Screw Driver : Sc AOT Plus : Unava	N•Cm quare	KPS-B13S	KPS-B15S	KPS-SB	KPS-LA	KPS-DLA			
Prima/ Genesis	RD	6ujbebu	4.3	10.3	"	12	V	N.	
Common Torque ASC Torque : 251 Screw Driver : So AOT Plus : Unava	N•Cm quare	KPR-BI3S	KPR-B15S	KPR-SB	L KPR-LA	KPR-DLA	KPS-CW	KPS-AW	KPS-B
Prima/ Genesis	WD	6ulbebua	4.8	10.3	11	12			
Common Torque ASC Torque : 251 Screw Driver : Sc AOT Plus : Unava	N•Cm quare	KPW-B13S	KPW-B15S	KPW-SB	KPW-LA	KPW-DLA			

MegaGen

Brand	Platform	Tru	Base	TruScan	TruLab	TruDigital		Screw	
Brand	Color/Size	3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
AnyRidge		MRD-B13S	4.3 MRD-B15S	10.3	1 6	12		I	1
Common Torque ASC Torque : 25 AOT Plus Torque Screw Driver : H	N•Cm e:30N•Cm	MRD-B13B	MRD-B15B	MRD-SB	MRD-LA	MRD-DLA	MRD-CW	MRD-AW	MRD-BS

Brand	Platform		TruBa	ase	TruScan	TruLab	TruDigital		Screw	
Бганц	Color/Size		3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
C1	NP	Engaging	4.0 MCN-B13S	MCN-B15S	10.5	11	12	y	T	W
Common Torque ASC Torque : 25 Screw Driver : H AOT Plus : Unav	N•Cm ex 1.25mm	Non-Engaging	MCN-B13B	MCN-B15B	MCN-SB	MCN-LA	MCN-DLA	MCN-CW	MCN-AW	MCN-BS
C1	SP	Engaging	4.5 MCS-B13S	MCS-B15S	10.5	11	12	MCS-CW	MCS-AW	
Common Torque ASC Torque : 25 Screw Driver : H AOT Plus : Unav.	N•Cm ex 1.25mm	Non-Engaging	4.5 MCS-B13B	4.5 MCS-B15B	MCS-SB	MCS-LA	MCS-DLA			· ·
C1	WP	Engaging	MCW-BI3S	MCW-B15S	10.5	11	12			MCS-BS
Common Torque ASC Torque : 25 Screw Driver : H AOT Plus : Unav	N•Cm ex 1.25mm	Non-Engaging	5.5 MCW-B13B		MCW-SB	MCW-LA	MCW-DLA			

Compatible with **Neodent**

Brand	Platform		TruBase	TruScan	TruLab	TruDigital	Screw		
Braild	Color/Size	3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
GM		NDG-Bi3:	NDG-B15S	10.5	11	12		I	
Common Torque: 25N•Cm ASC Torque: 25N•Cm AOT Plus Torque: 25N•Cm Screw Driver: Exclusive Neodent GM Torx		NDG-B138	3 NDG-B15B	NDG-SB	NDG-LA	NDG-DLA	NDG-CW	NDG-AW	NDG-BS

Neoss

Brand	Platform	TruB	ase	TruScan	TruLab	TruDigital		Screw	
	Color/Size	3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
ProActive Straight	3.25	6uißeßug	4.0	10	11	12	1	1	T
Common Torque ASC Torque : 25 Screw Driver : Ex AOT Plus : Unava	N•Cm xclusive Neoss Torx	NSN-B13S	NSN-B15S	NSN-SB	NSN-LA	NSN-DLA	NSN-CW	NSN-AW	NSN-BS
ProActive	3.5 6.0	4.5 <u>4.5</u>	4.5	10	"]	13	-		
ASC Torque : 25 Screw Driver : Ex	Common Torque : 32N•Cm ASC Torque : 25N•Cm Screw Driver : Exclusive Neoss Torx AOT Plus : Unavailable		NSR-B15S	NSR-SB	NSR-LA	NSR-DLA	NSR-CW	NSR-AW	NSR-BS

Nobel Biocare

Brand	Platform	TruBa	ase	TruScan	TruLab	TruDigital		Screw	
Brand	Color/Size	3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
NobelActive	3.0	3.5 <u>3.5</u>	3.5	10.5		12	1		1
Common Torque Screw Driver : U ASC : Unavailabl AOT Plus : Unavailabl	nigrip e	NA3-B13S	NA3-B15S	NA3-SB	NA3-LA	NA3-DLA	NA3-CW		NA3-BS
NobelActive	NP	NAN-B13S		10.5	NAN-LA	12	W	V	Y
Common Torque ASC Torque : 25 AOT Plus Torque Screw Driver : U	a: 35N•Cm N•Cm a: 35N•Cm nigrip	NAN-BI3B	NAN-B15B	NAN-SB		NAN-DLA	NAN-CW	NAN-AW	NAN-BS

*ASC/AOT/T-L/AOT Plus unavailable

Nobel Biocare

Brand	Platform		TruB	ase	TruScan	TruLab	TruDigital		Screw	
Drailu	Color/Size		3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
NobelActive	RP	Engaging	4.5 NAR-B13S	NAR-B15S	10.5	11	12			
Common Torque ASC Torque : 25 AOT Plus Torque Screw Driver : Ur	N•Cm e: 35N•Cm	Non-Engaging	4.5 NAR-B13B	NAR-BI5B	NAR-SB	NAR-LA	NAR-DLA		NAR-AW	A
NobelActive	WP	Engaging	5.5 NAW-B13S	NAW-B15S	10.3	11	12	NAR-CW		NAR-BS
Common Torque ASC Torque : 25! AOT Plus Torque Screw Driver : Ur	N•Cm :: 35N•Cm	Non-Engaging	5.5 NAW-B13B	NAW-B15B	NAW-SB	NAW-LA	NAW-DLA			

Nobel Biocare

Brand	Platform		TruB	ase	TruScan	TruLab	TruDigital		Screw	
Brand	Color/Size		3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
NobelReplace	NP	Engaging	4.0	4.0	9.9	11	12.5	1	1	
Common Torque ASC Torque : 25N Screw Driver : Un AOT Plus : Unava	N•Cm iigrip		NRN-B13S	NRN-B15S	NRN-SB	NRN-LA	NRN-DLA	NRN-CW	NRN-AW	NRN-BS
NobelReplace	RP	Engaging	4.8	4.8	9.9	11	14.5			- Indiana
Common Torque ASC Torque : 25N Screw Driver : Un AOT Plus : Unava	N•Cm ligrip		NRR-B13S	NRR-B15S	NRR-SB	NRR-LA	NRR-DLA	NRR-CW	NRR-AW	NRR-BS

Nobel Biocare

Brand	Platform	TruE	Base	TruScan	TruLab	TruDigital		Screw	
Brailu	Color/Size	3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
NobelReplace	WP	Engaging 2.2	5.5	9.9	"	14.5			
Common Torque ASC Torque : 25N Screw Driver : Un AOT Plus : Unava	I•Cm igrip	NRW-B13S	NRW-B15S	NRW-SB	NRW-LA	NRW-DLA	N T	I	
NobelReplace	6.0	Engaging	6.5	9.9	11	14.5	NRR-CW	NRR-AW	NRR-BS
Common Torque ASC Torque : 25N Screw Driver : Un AOT Plus : Unava	I•Cm igrip	NR6-B13S	NR6-B15S	NR6-SB	NR6-LA	NR6-DLA			

Straumann

Brand	Platform		TruB	ase	TruScan	TruLab	TruDigital		Screw	
Brand	Color/Size		3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
Bone Level	sc	g Engaging	3.5 SBS-BI3S	SBS-B15S	10.5	11	12	T	ı	T
Common Torque ASC Torque : 25 AOT Plus Torque Screw Driver : To	N•Cm •: 25N•Cm	Non-Engaging	3.5 SBS-B13B	SBS-B15B	SBS-SB	SBS-LA	SBS-DLA	SBS-CW	SBS-AW	SBS-BS
Bone Level	NC	Engaging	3.8 SBN-B13S	3.8 SBN-B15S	10.5	11	12	1	1	1
Common Torque ASC Torque : 25 AOT Plus Torque Screw Driver : To	N•Cm •: 35N•Cm	Non-Engaging	3.8 SBN-B13B	3.8 SBN-B15B	SBN-SB	SBN-LA	SBN-DLA	SBN-CW	SBN-AW	SBN-BS
Bone Level	RC	Engaging	4.0 SBR-B13S	SBR-B15S	10.5	11	12	W	Y	W
Common Torque ASC Torque : 25 AOT Plus Torque Screw Driver : To	N•Cm •: 35N•Cm	Non-Engaging	4.0 4.0 SBR-B13B	\$BR-B15B	SBR-SB	SBR-LA	SBR-DLA	SBR-CW	SBR-AW	SBR-BS

Compatible with **Straumann**

Brand	Platform		TruB	ase	TruScan	TruLab	TruDigital		Screw	
Brand	Color/Size		3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
BLX	RB	Engaging	SXR-BI3S	\$XR-B15S		11 SXR-LA	12	4	•	
Common Torque ASC Torque : 25 AOT Plus Torque Screw Driver : To	N•Cm a: 35N•Cm	Non-Engaging	4.3 SXR-B13B	SXR-B15B	10.5	SXR-LA	SXR-DLA	SXR-CW	SXR-AW	SXR-BS
BLX	*	Engaging	SXW-BI3S	5.5 SXW-B15S	SXR-SB	11	13	4		
Common Torque AOT Plus Torque Screw Driver : To ASC : Unavailabl	e: 35N•Cm orx	Non-Engaging	5.5 SXW-B13B	SXW-B15B		SXW-LA	SXW-DLA	SXR-CW		SXR-BS

*ASC/AOT/T-L/AOT Plus unavailable

Straumann

Brand	Platform	Tru	Base	TruScan	TruLab	TruDigital		Screw	
Didilu	Color/Size	3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
Tissue Level	* RN	5.2	5.2	9.4	12.5	16.9			
Common Torque Screw Driver : To ASC : Unavailabl AOT Plus : Unavailable	orx le	STR-B13S	STR-B15S	STR-SB	STR-LA	STR-DLA	-		4
Tissue Level	* wn	Engaging	6.4	10.1	12.5	18.5	STR-CW		STR-BS
Common Torque Screw Driver : To ASC : Unavailabl AOT Plus : Unavailabl	orx le	STW-BI3S	STW-B15S	STW-SB	STW-LA	STW-DLA			

*Call for details regarding AOT/T-L

Brand	Platform		TruBase	TruScan	TruLab	TruDigital		Screw	
Dialiu	Color/Size	3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
3i Certain	3.4	Engaging	3.9	9.9	11	13			
Common Torque ASC Torque : 20N Screw Driver : He AOT Plus : Unava	N•Cm ex 1.2mm	BC34-B13	S BC34-B15S	BC34-SB	BC34LA	BC34-DLA	9	•	1
3i Certain	4.1	Engaging	4.6	9.9	11	13	BC34-CW	BC34-AW	BC34-BS
Common Torque ASC Torque : 20N Screw Driver : He AOT Plus : Unava	N•Cm ex 1.2mm	BC41-B13	S BC41-B15S	BC41-SB	BC41-LA	BC41-DLA			

Brand	Platform	TruE	Base	TruScan	TruLab	TruDigital		Screw	
Brand	Color/Size	3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
3i Certain	5.0	Engaging	5.5	9.9	11	13			
Common Torque ASC Torque : 201 Screw Driver : He AOT Plus : Unava	N•Cm ex 1.2mm	BC50-B13S	BC50-B15S	BC50-SB	BC50-LA	BC50-DLA	4	4	I
3i Certain	6.0	Engaging	6.5	9.9	11	13	BC34-CW	BC34-AW	BC34-BS
Common Torque ASC Torque : 201 Screw Driver : He AOT Plus : Unava	N•Cm ex 1.2mm	BC60-B13S	BC60-B15S	BC60-SB	BC60-LA	BC60-DLA			

Brand	Platform	TruB	ase	TruScan	TruLab	TruDigital		Screw	
Brand	Color/Size	3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
Eztetic 3.1	2.9	3.5 	3.5	10.5	n .	12	1		
Common Torque ASC Torque : 25I AOT Plus Torque Screw Driver : He	N•Cm e: 30N•Cm	ZVN-B13S	ZVN-B15S	ZVN-SB	ZVN-LA	ZVN-DLA	ZVN-CW	ZVN-AW	ZVN-BS
TSV	3.5	ZV3-BI3S	ZV3-BI5S	10	n 12	12	W	N	I
Common Torque ASC Torque : 25I AOT Plus Torque Screw Driver : He	e: 30N•Cm N•Cm e: 30N•Cm ex 1.25mm	Non-Engaging 2.8 3.8 2.8	ZV3-B15B	ZV3-SB	ZV3-LA	ZV3-DLA	ZV3-CW	ZV3-AW	ZV3-BS

Brand	Platform		TruB	ase	TruScan	TruLab	TruDigital		Screw	
Drailu	Color/Size		3.5mm	5.5mm	Body	Analog	Lab Analog	DS/AOT/T-L AOT Plus	ASC	TruBase
TSV	4.5	Engaging Z.	4.5 V4-B13S	ZV4-B15S	9.8	11	12			
Common Torque ASC Torque : 25 AOT Plus Torque Screw Driver : H	N•Cm e:30N•Cm	Non-Engaging	4.5 	4.5 ZV4-B15B	ZV4-SB	ZV4-LA	ZV4-DLA	ų.		W
TSV	5.7	5.7 S.7 ZV5-B13S		5.7	9.8 ZV5-SB	1	12	zv3-cw	ZV3-AW	ZV3-BS
Common Torque ASC Torque : 25 AOT Plus Torque Screw Driver : H	N•Cm e:30N•Cm	Non-Engaging	5.7 V5-B13B	5.7		ZV5-LA	ZV5-DLA			

