

SPECIFICATION SHEET PORTABLE STAIRS

ADJUSTASTAIRS

- TREADS SELF LEVEL TO SUIT ANY HEIGHT WITHIN THE STAIR'S RANGE
- LIGHTWEIGHT, HEAVY DUTY ALUMINIUM FOR EASY RELOCATION AROUND THE SITE
- ONE PIECE UNIT CAN BE SET UP IN SECONDS AND JOINED IN-LINE
- SAFE, FAST, EASY ACCESS BETWEEN FLOORS, DECKS & IN TRENCHES
- FOLDS FLAT FOR EASY STORAGE & TRANSPORTATION
- DURABLE - BUILT TO LAST
- AVAILABLE WITH FIBREGLASS STILES AND RAILS FOR ELECTRICAL SAFETY
- AVAILABLE WITH OPEN RAISED TREAD TO SHED SNOW, ICE AND MUD, AND INCREASE GRIP



KEY COMPONENTS

CODE	DESCRIPTION
A	90 Degree Top Fixing Bracket
B	Folding Handrails
C	Large Support Foot
D	Anti-slip Self Levelling Stair Treads



OPTIONAL OPEN
RAISED TREAD



SEE INSTRUCTIONS FOR GUIDANCE ON SAFE USE, OPERATION, MAINTENANCE & STORAGE.

SPECIFICATION SHEET PORTABLE STAIRS


ADJUSTASTAIRS

CODE	MATERIAL	WIDTH	HEIGHT ADJUSTMENT	STEPS	WEIGHT RATING
TF3	HI-TENS ALUMINIUM	600mm	0.4M - 0.7M	3	500KG
TF6	HI-TENS ALUMINIUM	600mm	0.9M - 1.4M	6	500KG
TF6F	FIBREGLASS	600mm	0.9M - 1.4M	6	300KG
TF7F	FIBREGLASS	600mm	1.0M - 1.5M	7	300KG
TF9	HI-TENS ALUMINIUM	600mm	1.4M - 2.0M	9	500KG
TF12	HI-TENS ALUMINIUM	600mm	1.8M - 2.7M	12	500KG
TF15TS	HI-TENS ALUMINIUM	600mm	2.2M - 3.4M with support truss under stringers	15	500KG
TF18TS	HI-TENS ALUMINIUM	600mm	2.7M - 4.1M with support truss under stringers	18	500KG
TF3W	HI-TENS ALUMINIUM	1200mm	0.4M - 0.7M	3	500KG
TF6W	HI-TENS ALUMINIUM	1200mm	0.9M - 1.4M	6	500KG
TF9W	HI-TENS ALUMINIUM	1200mm	1.4M - 2.0M	9	500KG
TF12W	HI-TENS ALUMINIUM	1200mm	1.8M - 2.7M	12	500KG
TF15TSW	HI-TENS ALUMINIUM	1200mm	2.2M - 3.4M with support truss under stringers	15	500KG
TF18TSW	HI-TENS ALUMINIUM	1200mm	2.7M - 4.1M with support truss under stringers	18	500KG

ALSO AVAILABLE IN CUSTOM SIZES TO ORDER

HOW THE ADJUSTASTAIRS SELF LEVEL

THE INNOVATIVE DESIGN ALLOWS THE TREADS TO MOVE WITH THE STRINGERS, ALLOWING THE STAIR TO SELF LEVEL TO PROVIDE A FIRM, FLAT SURFACE AT THE DESIRED HEIGHT.

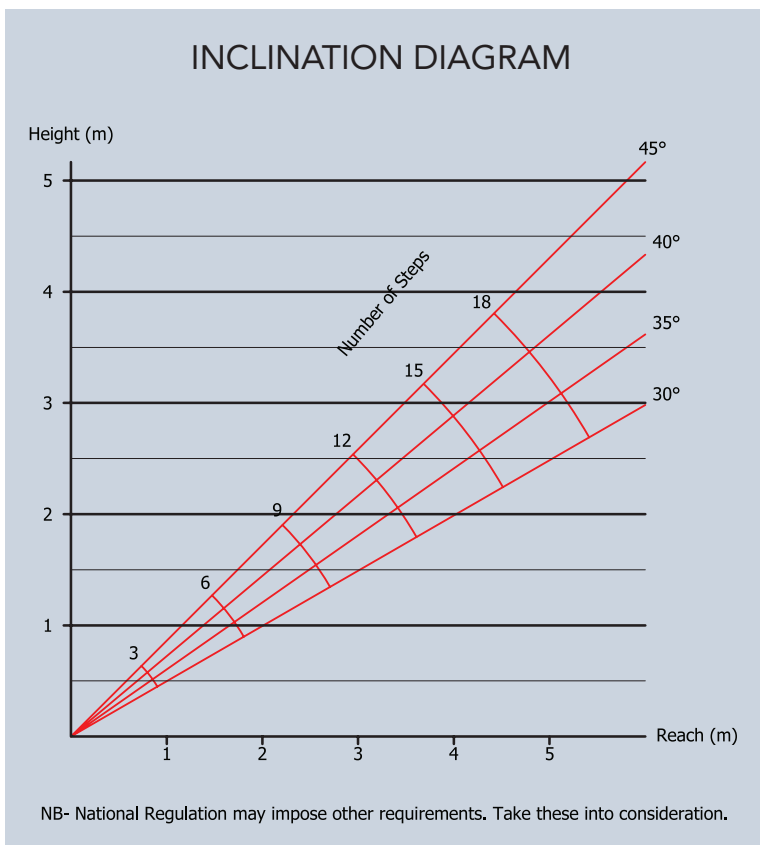


SPECIFICATION SHEET PORTABLE STAIRS


ADJUSTASTAIRS STRUTLOCK FOR 6-STEP TRUCK ACCESS

CODE	COMPONENT
TF6T	STRUTLOCK

- SUITABLE FOR TRUCK TRAY HEIGHTS UP TO 1.5MH
- INCLUDES STRUTLOCK FITTINGS TO LOCK AT ANY DESIRED HEIGHT WITHIN THE RANGE
- INCLUDES AN EXTENDED TOP STEP WITH RUBBER ON THE UNDERSIDE FOR SLIP RESISTANCE

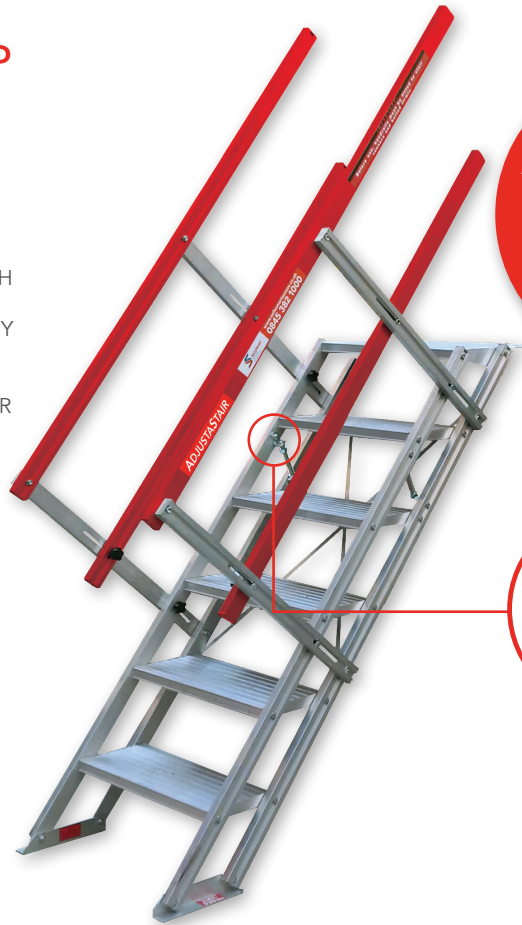

**ADJUSTASTAIRS
AVAILABLE
IN CUSTOM
SIZES**



ADJUSTASTAIRS EXTENSION


FEATURES & BENEFITS

- ADD 600MM OF HEIGHT TO ADJUSTASTAIRS
- CAN BE USED AS AN INDEPENDENT STAIR



CODE	COMPONENT	HEIGHT	WIDTH
TFBS	ADJUSTASTAIRS EXTENSION	600mm	600mm
123005	ADJUSTASTAIRS EXTENSION	600mm	1200mm



**FULLY WELDED
FRAME**



**ANTI-SLIP
STAIR TREADS**

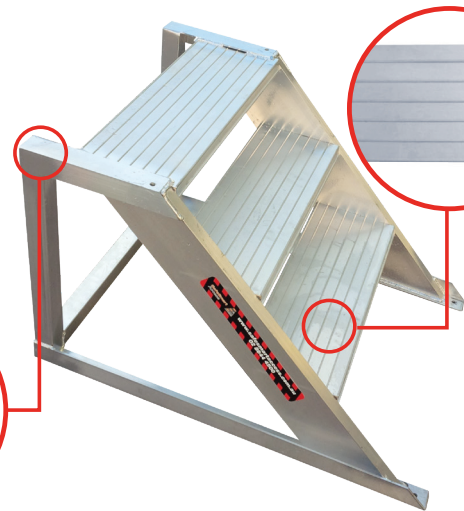

SPECIFICATION SHEET PORTABLE STAIRS

ADJUSTASTAIRS

