

SCALE BLASTER®


The eco-friendly solution to hard water

***Industrial Electronic Descaler
Model # SB-3600***



Premium Model — up to 12" - 36" Pipe

How ScaleBlaster works

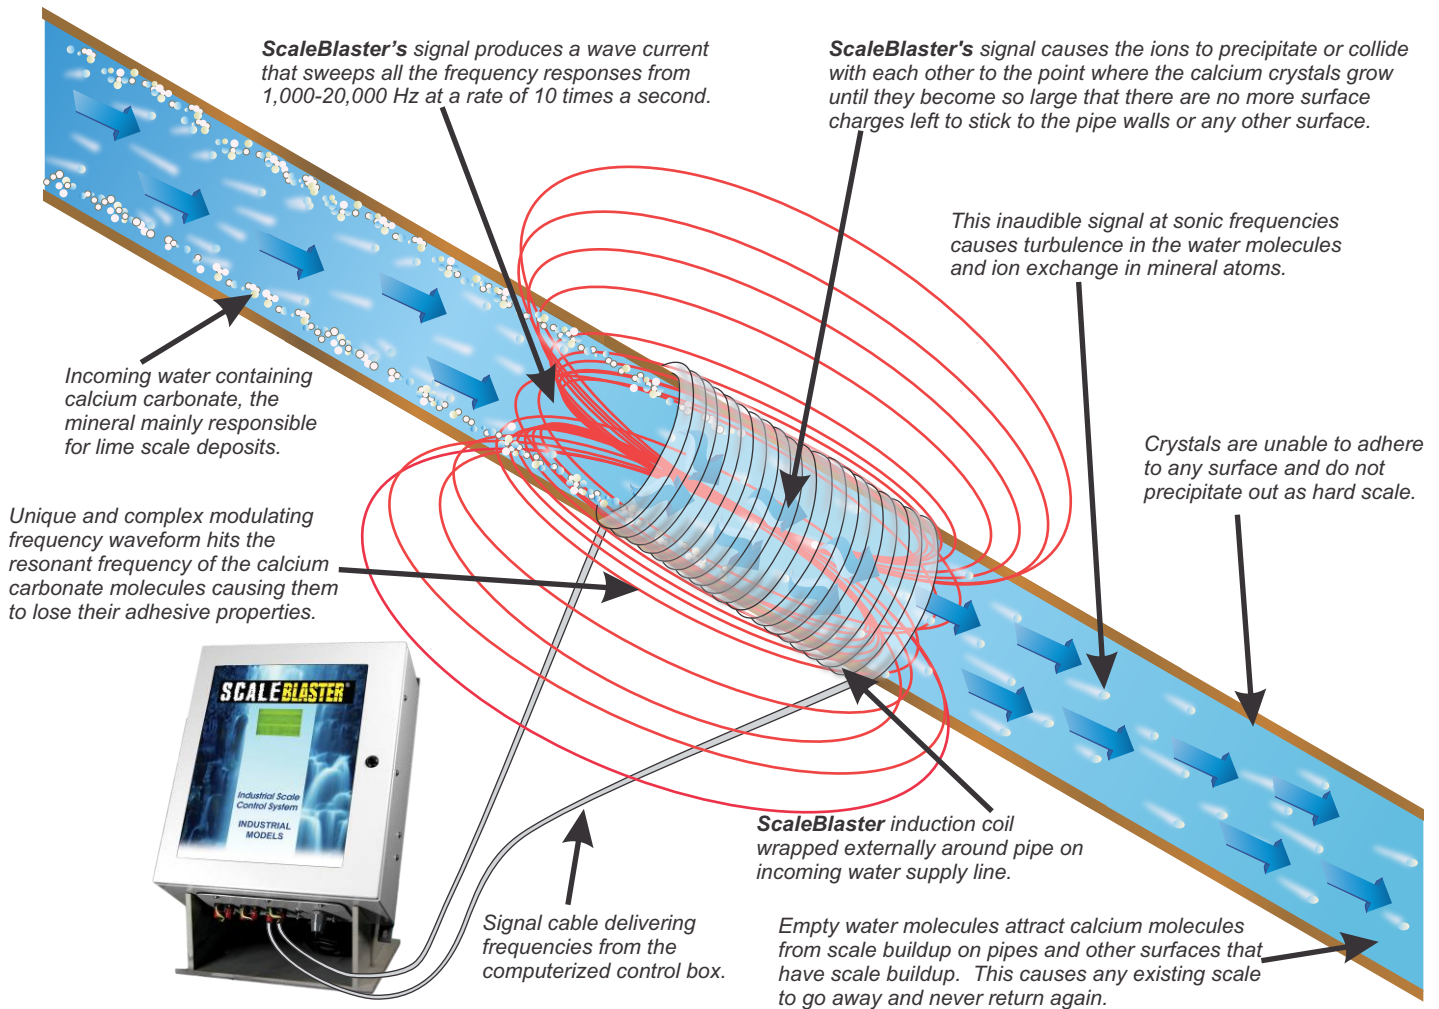

SB-3600 Electronic Descaler Specification Sheet



Input Voltage: 90-264 VAC at 47-63 Hz
Input Current: 5A rush @ 115 VAC, 2.5A rush @ 230 VAC
Number of Output Channels: Three
Output Voltage: 20 VDC
Output Current: 10 Amps Peak Min. @ 1KHz on all 3 channels**
Output Signal: AC Square wave, Frequency user selectable:

Swept frequency from 1KHz to 5KHz | Swept frequency from 1KHz to 10KHz | Swept frequency from 1KHz to 15KHz
 Swept frequency from 1KHz to 20KHz | Swept frequency from 1KHz to 2KHz | Swept frequency from 2KHz to 4KHz

Circuit Protection: Thermal overload protection on Switch-Mode Power Supply (SMPS), Over voltage protection on SMPS, Over current protection on SMPS, Micro-controller monitoring of enclosure/heatsink over temperature shutdown, Micro-controller monitoring of internal over temperature shutdown, Output sensing circuit for over current immediate shutdown protection, Main input noise filtering

Enclosure: Wall mount, gray powder-coated, 16-gauge steel. Nema 4 and 12 rated. With Gland Plate and polycarbonate window.

Operating Temperature: 10° F to 130° F (12° C to 54° C)

Storage Temperature: 2° F to 150° F (17° C to 66° C)

Warranty: 3 Years parts and labor

Physical Properties:

SB-3600 Unit Dimensions: 24"x20"x8" (61cm x 50.8cm x 20.3cm) | **SB-3600 Unit Weight:** 60 LBS (27.2 Kg)

SB-3600 Shipping Crate Dimensions: 26"x30"x14" | **SB-3600 Shipping Weight with crate:** 146 LBS*

* Estimated shipping weight. (Varies with differing amounts of signal cable.)

** Maximum coil inductance: 200uH. (See coil chart.)