

# Blaze Low PL-BLAZE-L-BK

Path Light

Product Finishes: ■



## Specifications:

**Voltage:** 12V AC

**Wattage:** 1.5

**Volt Amps:** 2.5

**Lumens:** 60

**Color Temp:** 2700k

**IP Rating:** 65

**CRI:** 92.5

**Cable Length:** 24"

**Material:** Anodized aluminum

**Lux (lx):** 11.5 lx

**Candelas (cd):** 45 cd

**Rated Life:** 50,000 hours

**Warranty:** 7-year comprehensive

**Light Source:** Integrated


**Dimmable:** No

**Color-Changing:** No


## Product Uses:

Pathways, Bushes, Garden

Beds, Driveways, Grasses

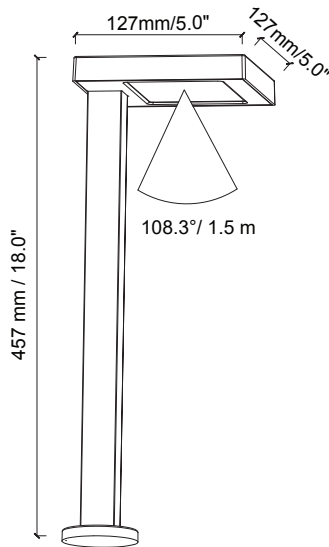

Max. Luminous intensity : 45 cd

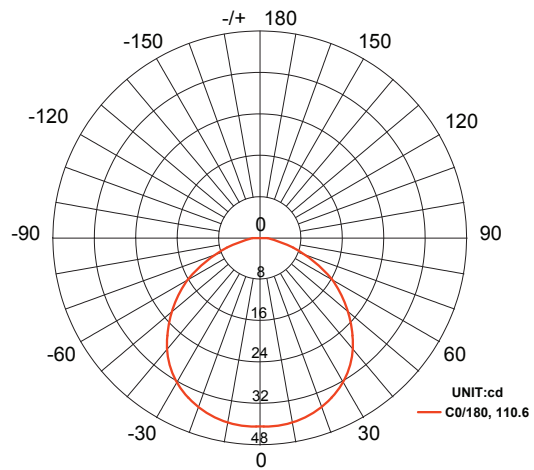

AVERAGE BEAM ANGLE (50%): 108.3 DEG

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
1	13.78/46.22		1.64
1.5	2.58/8.67		2.46
3	0.65/2.16		4.92
5	0.25/0.88		8.2
6.5	0.17/0.59		10.66

AVERAGE BEAM ANGLE 0/180 (50%): 108.3 DEG

