

Copper Creek Hardware DBZ(F/H) 3410 Series ANSI Grade-2 Z-Wave Electronic Deadbolt Specifications

- Z-Wave electronic deadbolt fully integrated on NEXIA "Smart home" platform.
- Get instant messages when deadbolt opened directly to any smartphone.
- Elegant profiles with LED backlit touchpads.
- Easy to program.
- Use up to 25 individual pass codes and 1 Master/Programming code.
- Programmable from any smart phone or computer globally with an internet connection.
- Can be set to automatically lock (10-99 seconds)
- Replaces any standard deadbolt. Easy to install.
- Uses 4 standard AA batteries to operate electric latch motor (not included).
- 2 year mechanical and 5 year finish warranty






DBZF Single Cylinder Deadbolt

DBZH Single Cylinder Deadbolt

Deadbolt Specifications & Options						
ANSI / BHMA	Exceeds ANSI Grade-2, 150,000 cycles					
Escutcheon Face Height	5-1/2"					
Cylinder	KW1 5-pin std, "C" optional.					
Keying	As specified: Available Master keyed, Builder keyed, KD, KA.					
Latch	Adjustable backset, 1" round corner narrow faceplate std. Square corner or drive-in adjustable optional.					
Strike	PT-DS16 and PT-DS26: Round corner strikes std. Others available.					
Door Prep	Edge bore 1", latch mortise 1"x 2-1/4", cross bore 2-1/8", backset standard 2-3/8", optional 2-3/4".					
Door Thickness	Min 1-3/4", Max 1-3/4".					
Handing	Non-handed					
UL Labeled	Available 20-minute UL Labeled.					
Warranty	2 Year mechanical, 5 year finish.					

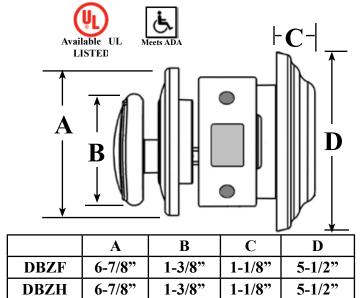

Ī	In Stock Finishes					<u> </u>			Case Qty
	IN.	SS	TB	PS	AB	AN	ВС	PB	- •
İ	DBZF	X	X	X					12
ı	DBZH	v	v	v					12

Function	Operation
3410 Single Cylinder Z-Wave Deadbolt	Lock or unlock deadbolt with key or interior turn-piece. Alternatively unlock from outside by entering correct code, or via any smartphone or computer with an internet connection when paired with a Z-Wave network.