

# SAND DOLLAR®

## TOP MOUNT SAND FILTER

So Clean. So Clear. So Easy.

The Sand Dollar filter is the perfect high-performance sand filter. It's incredibly simple to operate and maintain, and it's built with long-term reliability in mind. Plus, its highly efficient design provides all the clean, crystal-clear water your pool requires year after year.

Pool water is routed through the sand-filled pressure vessel. The sand traps particles so small they are undetectable to the naked eye. Over time, dirt accumulates in the spaces between the sand particles, causing the pressure in the vessel to rise. This signals you to "backwash" the filter by simply reversing the water flow and "knocking out" the dirt.




[PENTAIR.COM](http://PENTAIR.COM)



## SAND DOLLAR® TOP MOUNT SAND FILTER

### For maximum water clarity

Pool filter operation doesn't come any easier. The multi-port valve of the Sand Dollar filter puts all filter functions right at your fingertips—just rotate the handle to the desired position, and the Sand Dollar filter does the rest for sure and simple operation.

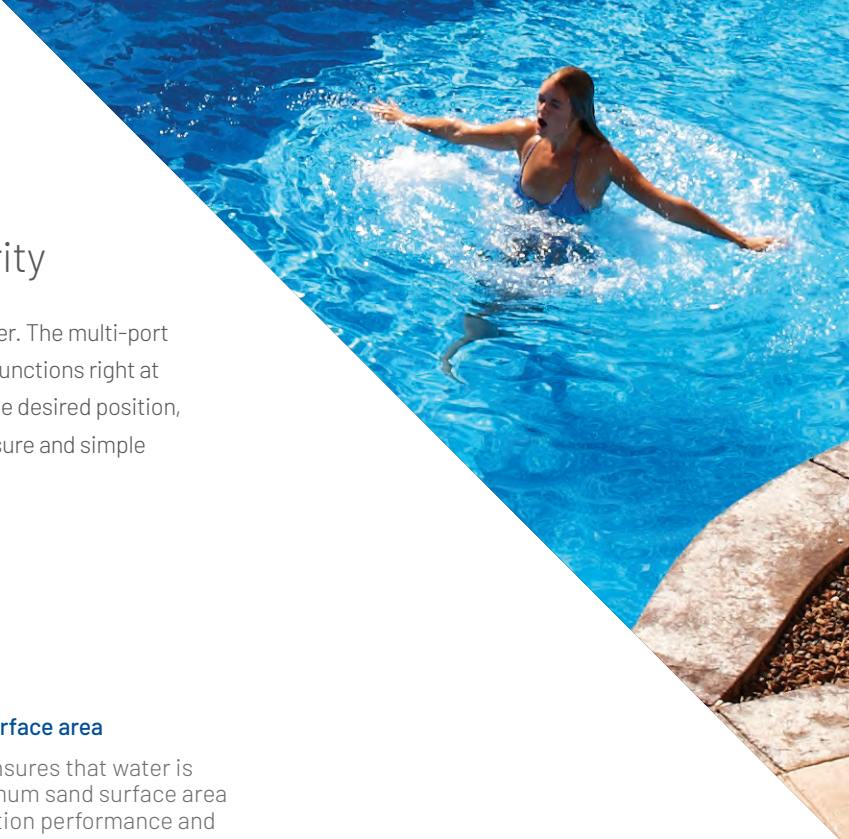

#### KEY FEATURES

##### One-piece thermoplastic tank

One-piece thermoplastic tank for exceptional strength, corrosion resistance and long life.

##### Top mount features

Top mount, six-function, 1½" multi-port valve features a pressure gauge and manual air relief for optimum filtration efficiency.

##### Maximum sand surface area

Internal design ensures that water is exposed to maximum sand surface area for superior filtration performance and efficient backwashing.

##### Easy service

Combination water and sand drain for easy service and winterizing.

Model Number	Filter Area Sq. Ft.	Vertical Clearanc	Filter Diameter	Required Sand <sup>†</sup> (lbs.)	Flow Rate GPM <sup>**</sup>	Turnover Capacity-Res. (Gallons)		
						8 hrs.	10 hrs.	12 hrs.
SD 35	1.40	36.75"	16.50"	100	35	16,800	21,000	25,200
SD 40	1.80	46.00"	19.50"	150	40	19,200	24,000	28,800
SD 60	2.30	50.50"	22.50"	250	60	28,800	36,000	43,200
SD 70	3.15	73.00"	24.00"	300	70	33,600	42,000	50,400
SD 80 <sup>***</sup>	3.50	74.00"	26.00"	350	75	36,000	45,000	54,000

<sup>†</sup>Use standard #20 silica sand    <sup>\*</sup>Required clearance to remove the valve    <sup>\*\*</sup>Maximum flow rate    <sup>\*\*\*</sup>SD 80 available with 1½" or 2" valve



#### TRADEGRADE

The TradeGrade family of products is exclusively made for and sold by the world's most demanding pool professionals.

1620 Hawkins Ave | Sanford, NC 27330 | United States | 800.831.7133 | pentair.com

All indicated Pentair trademarks and logos are property of Pentair Inc. or its global affiliates in the U.S.A. and/or other countries. Third party registered and unregistered trademarks and logos are the property of their respective owners.