

SL BAR 520



The SL BAR 520 allows lighting professionals greater creative abilities by providing extreme output from multiple blended sources. Each of the unit's six homogenized cells provides intense output at an 8° beam angle. The high output LED luminaire easily adapts to any production environment as it retains a traditional light source appearance.


The flexibility of the SL BAR 520 also enables designers to utilize the luminaire in any orientation and configuration via a quick connect system that easily ensures perfect pixel pitch between multiple fixtures

The SL BAR 520 includes standard mounting brackets for floor or pipe mount. Mounting brackets feature secure lock off and a tight profile to insure close placement to further insure smooth beam spreads. Units are designed for daisy chaining and include cable management for clean cabling and easy set up.

Features :

- Rugged Construction
- Quick connect system retains perfect pixel pitch
- LED engine RGBW for exceptional output and color
- Harmonize Color Calibration
- Built-in color presets, effects and chases
- HSIC (Hue - Saturation - Intensity - Color temperature) operation mode
- 8 or 16-bit DMX-512A operation for smooth stepless fades
- On-board LCD Menu System for addressing and setup
- Remote configuration available via RDM
- PowerCon in and thru power connections
- 5-pin DMX-512A(RDM) in and thru connections

Drawing Diagram :

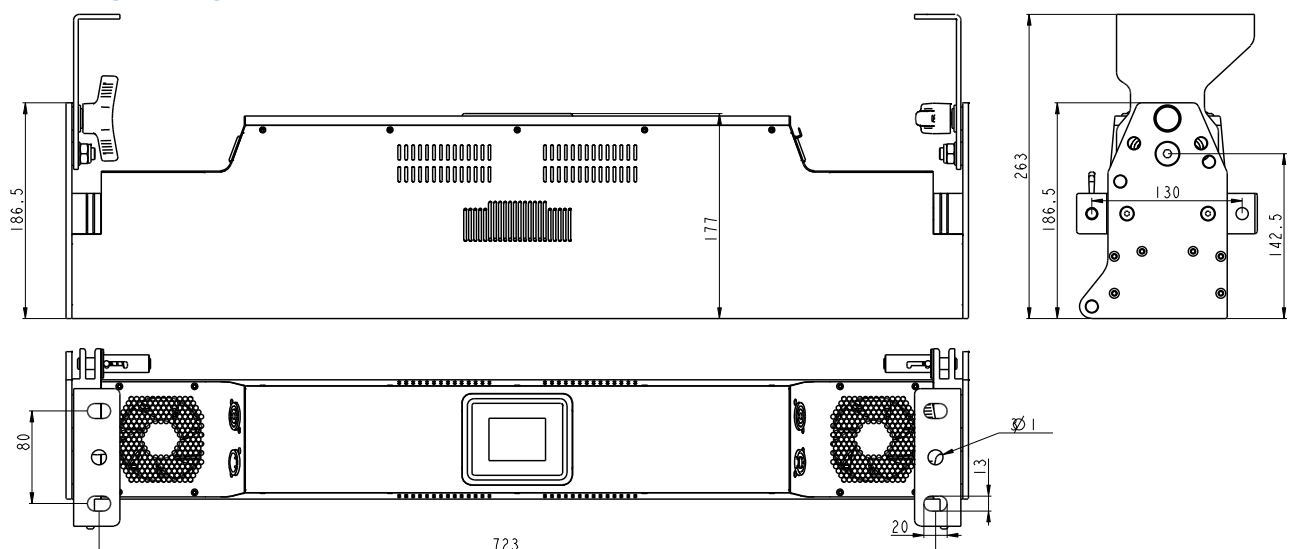

Technical Specifications :

Version:
SL BAR 520 RGBW, IP20

Optics:
8 degree beam angle
6 independent control cells

Controls:
DMX-512A(RDM)
Local LCD control
Master/slave

Features:
Color Gel filter preset
Chase - Strobe + Duration Effect Engine
LED & Tungsten Curves selection
Harmonize Color Calibration

Modes:
HSIC
8 bit RGBW
16 bit RGBW

Physical:
90-240VAC, 300W
780mm x 263mm x 103mm, 8.8kg
31" x 11" x 4", 20 lbs
CE, ETL, cTick

Luminance:
8000 lumens
CRI/CQS:
>90 (RGBW)




Ordering Information :

SLBAR520

SL BAR 520 RGBW IP20

Harmonize Color Calibration Technology

At the heart of all Showline products is Philips Harmonize Calibration technology. Harmonize is a proprietary, advanced LED color matching system, consisting of 3 correction modules: RGB, RGBW and Cool White/Warm White. Every Showline fixture undergoes rigorous testing to provide you with consistent control of color and intensity as well as output of the highest quality.

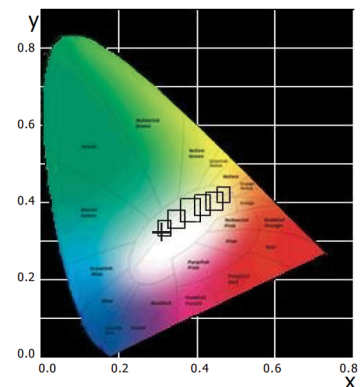

Philips Group 2013. All rights reserved.

The Company reserves the right to make any variation in design or construction to the equipment described. E&OE. Philips Entertainment delivers fully integrated lighting solutions; from simple lamps to complete systems designed with the specific needs of the entertainment and specialized display lighting markets.

www.philips.com/showline

Philips Entertainment U.S.
10911 Petal Street
Dallas, TX 75238
Tel: +1 214647 7880
Fax: +1 214647 8030

Philips Entertainment Lighting Asia Limited
Unit C, 14/F, Roxy Industry Centre
No. 41 - 49 Kwai Cheong Road
Kwai Chung, N.T. Hong Kong
Tel: +852 27969786
Fax: +852 27986546

Philips Entertainment Group Europe
Rondweg Zuid 85
Winterswijk 7102 JD Netherlands
Tel: +31 543-542343
Fax: +31 53 4500425

Philips Entertainment New Zealand
19 - 21 Kawana Street, Northcote
Auckland 0627, New Zealand
Tel: +64 9481 0100
Fax: +64 9481 0101