



HP SERIES








## **PRODUCT DESCRIPTION:**

The LED Acrylic Highbay Pendant blends high performance with a premium aesthetic that is well suited to many industrial and commercial applications, including retail and big box stores, auto showrooms, gymnasiums, warehouses and manufacturing facilities. The highbay features cutting-edge optics and a durable acrylic reflector that deliver high vertical footcandles with minimal glare. Achieving more than 140 lumens per watt, the highbay qualifies for DesignLights Consortium 4.0 performance specifications.

## **FEATURES:**

- Five years limited warranty
- Power Factor > 0.9
- 0-10V Dimming
- High performance with efficacy of 140 lm/W
- Indoor / Damp rated
- L70 Lifetime of minimum 100,000 hours
- Standard hook attachment provided
- Operating temperature: -4°F to 122°F

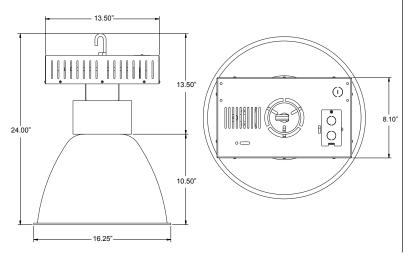

MODEL SELECTION				Typical order example: HP-120UVA-00H-500				
HP			А			н	5	00
FAMILY	WATTAGE	VOLTAGE	REFLECTOR	BBU	SENSOR	MOUNTING	сст	SKU
HP= High Bay Pendant	080= 80W 120= 120W 155= 155W	UV= 120-277V HV= 480V	A= Acrylic Shade	0= None B= Battery Backup Unit	0= None M= On/Off Sensor L= Bi-Level Sensor	H= Hook & Stem (Standard)*	<b>5=</b> 5000K	<b>00=</b> Standard SKU

Acrylic shade included in shipment of all model numbers.

### \*To stem mount product, remove hook in the field.

# MaxLite



## LED HIGH BAY PENDANT HP SERIES

#### **SPECIFICATIONS:** HP-080UVA-00H-500 HP-120UVA-00H-500 HP-155UVA-00H-500 ITEM SPECIFICATION DETAILS Power Consumption (W) 82.4 120.0 157.2 Lumens Delivered (Im) 11,600 16,800 22,200 Efficacy (Im/W) 141 140 141 GENERAL ≥85 CRI PERFORMANCE Color Temperature (K) 5000K 100,000 L70 Lifetime (hours) Color Consistency Proprietary binning for uniform color 200W MH 200W+ MH 400W MH HID Equivalent Power Factor 0.99 ELECTRICAL Input Voltage 120-277V Mounting Hook and Stem Standard\* PHYSICAL **Operating Temperature** -4°F to 122°F Humidity 20-85% RH, non-condensing Certification cULus, DLC Premium, FCC, Lighting Facts Material Usage RoHS compliant; no mercury CERTIFICATION Environment Indoor / Damp Warranty 5 Years

\*To stem mount product, remove hook in the field.

## **ORDERING\*:**

HIGH BAY								
ORDER CODE	MODEL#	WATTAGE	MOUNTING	сст				
101020	HP-080UVA-00H-500	80		5000K				
101022	HP-120UVA-00H-500	120	Hook					
101023	HP-155UVA-00H-500	155						

ACCESSORIES						
ORDER CODE MODEL#		DESCRIPTION				
11232	SKFHBCL	Drop lens for use with Acrylic Bell Reflector				