

Pool Range CE-PH23

Features:


- Stainless steel casing
 - Copeland Scroll Compressor
 - 5 Metres of programmer cable
 - Cascade any number of units
 - Volt Free Switching control
 - Heating & cooling functions
 - Intelligent defrosting
 - Precision electronic expansion valve
 - High efficiency titanium pool heat exchanger
 - Refrigerant diagnostic gauges
 - Working range +43 to -15
 - Low current soft start
 - 5 Year Warranty*
- *see warranty terms and conditions



Specifications:

Model	CE-PH23
ERP Rating	A++
Rated Capacity @28°C Water/ 20°C Ambient	20.1kw
Rated Capacity @28°C Water/ 7°C Ambient	15.6kw
Rated Capacity @40°C Water/ 20°C Ambient	19.0kw
Rated Capacity @40°C Water/ 7°C Ambient	14.7kw
Rated Capacity @7°C Water/ 25°C Ambient	10.2kw
Rated Power Input	4.6kw/23A
Max Power Input	6.1kw/29A
Compressor Make/Model	COPELAND/ZW51KWP-PFZ522
Noise	≤60dB(A)
Power Supply	220-240v AC-50Hz

Outlet Water Temperature	15°C-40°C
Protection Class	IPX4
Anti-electric Shock Class	Class I
Refrigerant/Charge	R410A-2850g
Minimum Water Flow Required	7.5m ³ /h
Pool Volume	<70m ³
Water Connections	1 ½ " PVC
Climate Type	-15~43°C
Product Dimension L x W x H	816/717/895mm
Net Weight	108kg

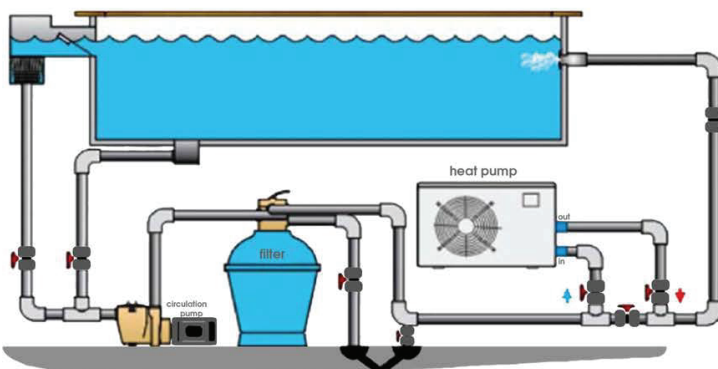

Hinged door panel for easy installation & access



Intelligent touch screen controller