


L80

GALLERY

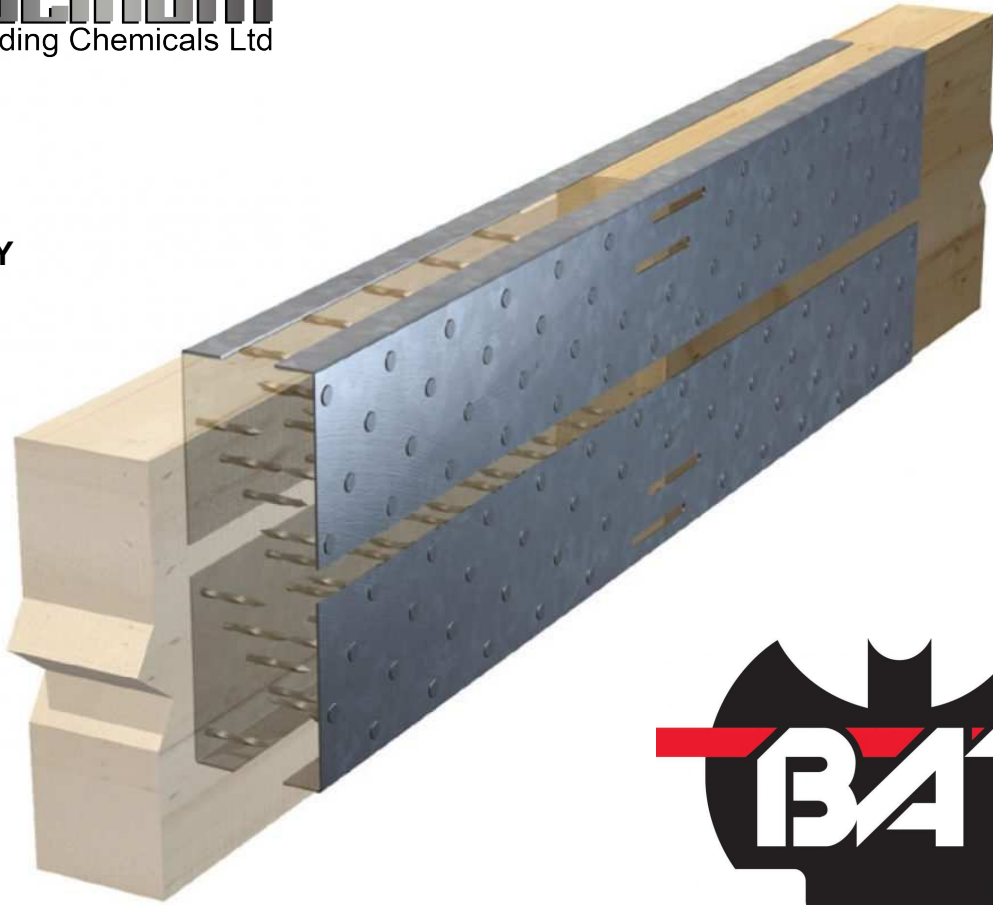

PRODUCT ATTRIBUTES

Brand	Expamet BAT
Generic Ref	L80
Product Range	Builders Metalwork
Product Sub-range	Timber Connectors
Product Type	Splice Plates
Material	Galvanized Mild Steel DX51D+Z275 to EN10346:2015
Coating/Finish/Colour	275g/m ² Zinc Coating
Length 1/Projection	560mm
Length 2/height	80mm
Width/Wing Length	18mm
Plaster/Render/Joist depth	175-200mm Joist
Material Gauge	1.2mm

Individual Weight (kg)	0.512
Declared Loadbearing Capacity	Moment Capacity 1.5kNm (SLS)
Fire Rating	Euroclass A1
Fixing Hole Dimensions	3.8mm
Fixing Type	3.75 x 30mm Square Twisted Sherardized/Galvanised Nails
Installation requirement 1	All nail holes must be filled.
Installation requirement 2	Gap between timbers must not exceed 6mm.
Installation requirement 3	Timbers must be of equal cross section +/- 2mm.
Installation requirement 4	5 Plates must be used per splice connection.
Unit of Sale EAN	5014316003704
Sales Qty	32
Packaging material	Cardboard
Carton Ref	TSPL98
Carton/Size	608 x 178 x 120
Packaging weight	0.376
Packaged transit weight	16.76
Features/Benefits 1	275g/m2 Gavanized Coating
Features/Benefits 2	Saves replacing full joists when only the ends are damaged