

Do not install using provided double-sided tape in conditions under 55° F.

WARNING: RISK OF FIRE OR ELECTRICAL SHOCK. This fixture must be installed in accordance with National Electric Code and local code specifications. Failure to follow these codes and installation instructions will void the warranty and may result in serious injury and/or damage to the fixture. When using multiple fixtures, do not exceed the total wattage load as specified by the transformer rating. This product is designed for above ground installation only.


PRIOR TO INSTALLATION OR SERVICING THIS PRODUCT, DISCONNECT THE MAIN POWER SUPPLY. DO NOT INSTALL THE PRODUCT WITHIN 10 FEET OF A POOL OR SPA.

POWER	Q SERIES: FULL COLOR					
	32 ft.	24 ft.	16 ft.	12 ft.	8 ft.	4 ft.
VOLTAGE	24V DC	24V DC	24V DC	24V DC	24V DC	24V DC
WATTAGE	50W	37.5W	25W	19W	12.5W	6.5W


POWER	K SERIES: CLASSIC WHITE			
	16 ft.	12 ft.	8 ft.	4 ft.
VOLTAGE	24V DC	24V DC	24V DC	24V DC
WATTAGE	32W	24W	16W	8.5W

WIRING	Q SERIES	K SERIES
BLACK	Common	Common
RED	Red (+24V)	Positive (+24V)
YELLOW	Blue (+24V)	Not Used
GREEN	Green (+24V)	Not Used

What's in the box?

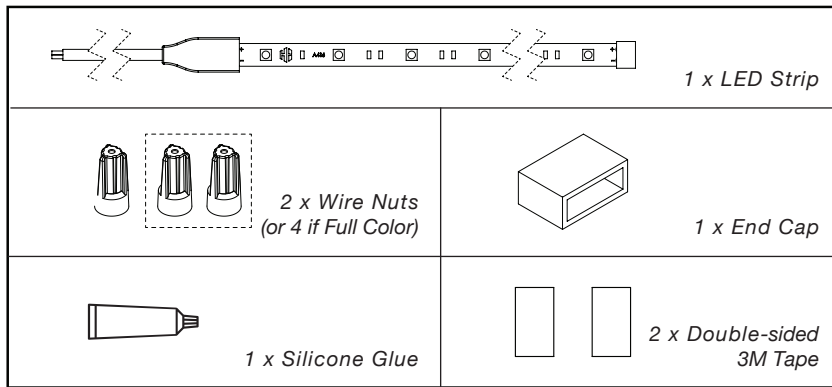


Mounting the strip

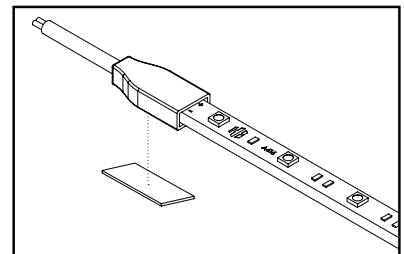


Use the Double-sided 3M Tape to secure the connector end.

Cutting the strip

NOTE: Disconnect power before cutting strip

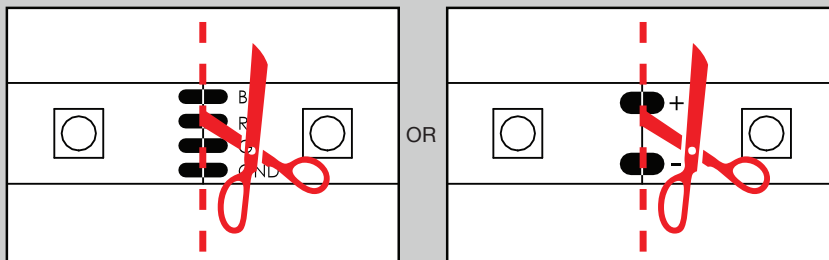

STEP 1: Cut strip at one of the designated points on the strip.

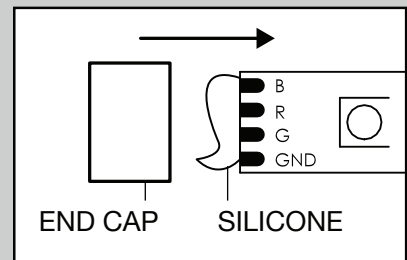

STEP 2: Seal the end with provided silicone and end cap.