



Depend on Davey

**DAVEY**

## APPLICATIONS

- Dewatering of cellars, garages, ditches, pits & ponds
- Pumping clean or slightly dirty water
- Sump emptying
- Decorative water features

## WHY CHOOSE THE Davey Submersible Dewatering Pump

- Open impeller, centrifugal design
- Able to pump small soft solids in suspension
  - Less susceptible to blockage

Double mechanical shaft seal in oil bath with hard faced silicon carbide / ceramic seal on pump side (D15 models have single seals)

- Added motor protection
- Long service life

Sand slinger lip seal

- Added protection
- Long service life

Corrosive resistant 304 stainless steel motor shell and strainer

- Long service life
- Attractive, lasting appearance

High quality paint finish

- Long service life
- Attractive lasting appearance

Automatic resetting thermal overload

- Protected against overloading

HO7RNF oil resistant leads, 10 metres long with 3 pin power plug

- Easy to connect to power supply
- Longer life in dirty water



## Davey Submersible Drainage Pumps

Model Numbers:  
D15A, D25A, D40A & D40M

Portable electric submersible drainage pumps up to 400W nominal output.

"A" suffix models equipped with preset length float switch for automatic operation

### OPERATING LIMITS

Capacities to	240 lpm
Maximum total head	12m
Maximum submergence	10m
Maximum operating temperature	50°C

**Suitable Fluids:** Clean or "grey water" of neutral pH containing up to 10% small soft solids or 1% fine solids. Some wear should be expected while pumping hard solids in suspension.

### MATERIALS OF CONSTRUCTION

Part	Material
Motor top	Polycarbonate (D15), Cast Iron (D25/40)
Pump body	Cast iron
Motor shell	304 stainless steel
Strainer	304 stainless steel
Impeller	Polycarbonate (D15), Cast Iron (D25/40)
Lip ring	Nitrile
Mechanical seal	Silicon carbide/ceramic in oil bath w/- oil seal Carbon/ceramic on motor side (D25/40)
Seal and bottom bearing housing	Cast iron
Handle	304 stainless steel
Fasteners	304 stainless steel
Float & power supply leads	HO7RN-F oil resistant

### ELECTRICAL DATA

Supply voltage/Hz	240V/50Hz single phase		
Cable length	10m		
Output	150W	250W	400W
Start	9.0A	12.0A	10.5A
Run	1.5A	2.2A	3.7A
Speed	2 pole, 2850rpm		
Insulation class	F		
IP rating	X8		
Starting	P.S.C.		

### INSTALLATION & PRIMING

Use a rope to position and retrieve the pump. Do not lower or retrieve the pump using the power lead as this may damage the cable entry seals, causing water leaks and unsafe operation.

Don't use this product for recirculating or filtering swimming pools, spas, etc. While these pumps are built to high safety standards, they are not approved for installations where people will be in the water while they are operating.


Don't pump abrasive materials. Sand and grit in the water being pumped will accelerate wear, causing shortened pump life.

Keep your pump clean, particularly in situations where lint, hair or fibrous materials may get bound around the pump shaft. Regular inspection and cleaning will extend pump life.


Make room for the float switch to operate. Automatic models have a float switch to turn them on when the water level rises and turn them off again when it has been pumped down to the safe operating level of the pump. If the float switch is not free to rise and fall, correct pump operation may not be possible.

Don't run your pump dry. Non-automatic models must be switched off manually or by way of an external float/level switch when the water level is reduced to the top of the pump housing.

### CURVES

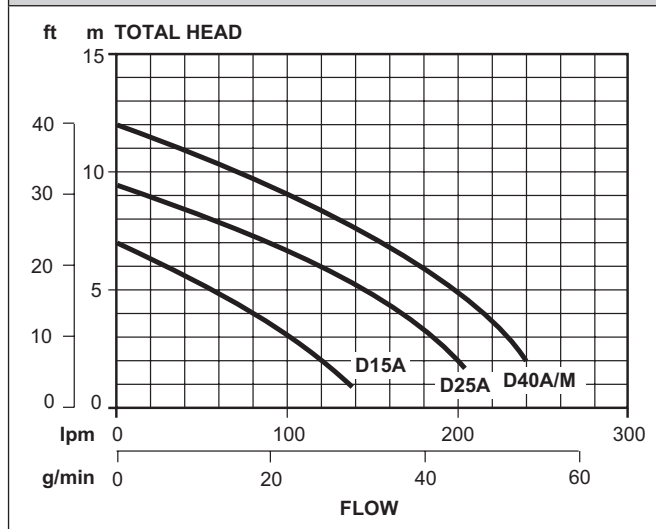

### DIMENSIONS

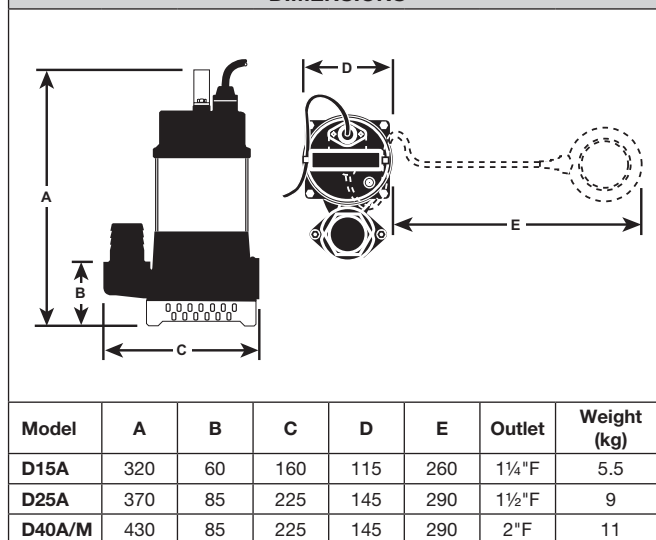

All dimensions in mm unless otherwise stated.