



# PET FOUNTAINS

## Pet Fountain Series

### MODEL M-PM74

#### DUAL STATION PET FOUNTAIN

#### STANDARD FEATURES

- 100 mesh inlet strainer
- Pushbutton requiring less than 5 pounds for activation
- Stainless steel, anti-rotation, non-squirt bubblers
- Vandal resistant stainless steel access panel
- 18 gage, 304 stainless steel basins
- Heavy duty, 304 stainless steel polished to a satin finish

#### SUGGESTED SPECIFICATIONS

Dual pet fountain shall be Murdock model M-PM74. Model shall include two pet fountains. Pet fountain pushbuttons shall be self-closing requiring less than 5 pounds of force to activate the internally mounted valves.

Bubbler shall be stainless steel with a non-squirt feature and operate on a water pressure range of 20-105 psig.

Unit shall be constructed of 14 gage type 304 stainless steel polished to a satin finish with 18 gage pet fountain bowls. Bottom plate shall be 3/16" thick and include two mounting holes with four additional mounting holes for pet fountains. 1/2" expansion anchor bolts are furnished. All other exposed fasteners shall be vandal resistant stainless steel screws.



Standard Model: M-PM74

#### MODEL:

*(Must Specify)*

- M-PM74 Satin stainless finish (Shown)
- M-PM75 Green powder-coated
- M-PM76 Red powder-coated
- M-PM77 Blue powder-coated

*Custom color finishes available upon request*

#### OPTIONS

*(additional costs may be incurred)*

- FRU2 Underground freeze-resistant valve <sup>1</sup>
- IAP In-ground anchor plate <sup>1</sup>
- LOGO Customer Specified logo <sup>1</sup>

*Options Notes:*

<sup>1</sup> See separate option sheet.

Please visit [www.murdockmfg.com](http://www.murdockmfg.com) for most current specifications.



Member of  
U.S. Green  
Building  
Council



Recyclable  
Product

Complies with the  
following standards:



ANSI / NSF 61.9



GREEN  
UPC  
Water Efficiency



Public Law  
111-380  
(No Lead)

MURDOCK MFG.

Member of  
MORRIS GROUP  
INTERNATIONAL

M-PM74

08/28/14




# PET FOUNTAINS

All dimensions are subject to manufactures tolerance of plus or minus 1/8" nominal and subject to change without notice. Murdock Mfg. assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit [www.Murdockmfg.com](http://www.Murdockmfg.com) for most current specifications.

## Pet Fountain Series

### MODEL M-PM74 DUAL STATION PET FOUNTAIN

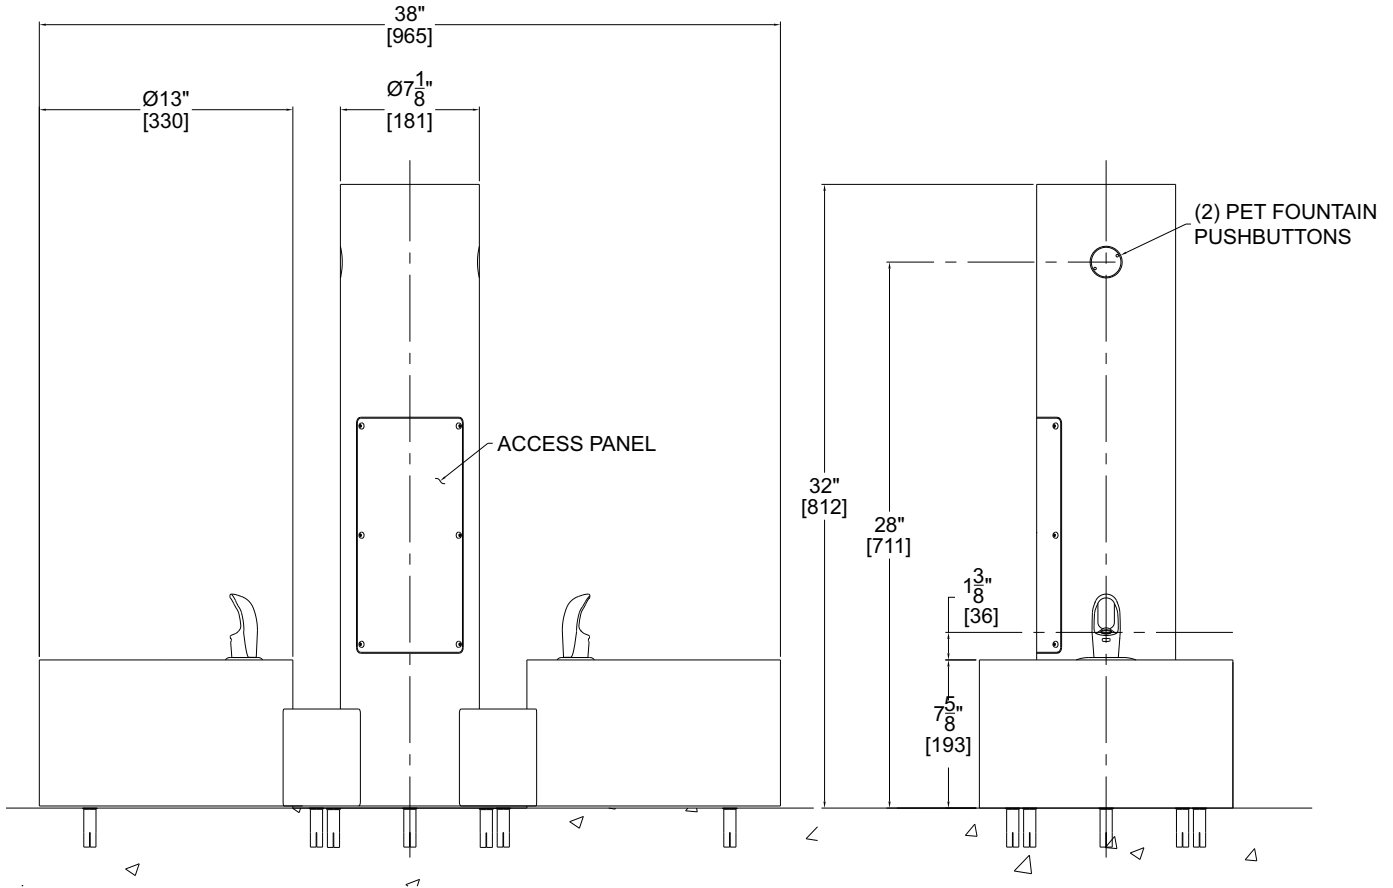

**NOTES:**

1. ALL DIMENSIONS ARE IN INCHES [MM].

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	Model Number & Options _____	Quantity _____	All dimensions are subject to manufactures tolerance of plus or minus 1/8" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit <a href="http://www.murdockmfg.com">www.murdockmfg.com</a> for most current specifications.
	Company _____		
	Contact _____	Title _____	
	Signature (Approval for Manufacturing) _____	Date _____	

MURDOCK MFG.

