


**Geberit WC flush control with electronic flush actuation, mains operation, dual flush, flush plate Sigma10, automatic/touchless/manual**

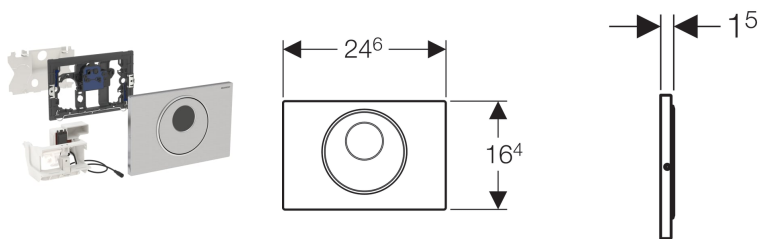

**Application purposes**

- For public and semipublic areas
- For releasing a dual flush
- For solid and drywall construction
- For touchless flush actuation of Geberit Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block
- Not suitable for less-abled installation

**Characteristics**

- Touchless manual flush actuation
- Automatic flush actuation
- Touchless flush actuation for single or dual flush by moving hand toward sensor
- Manual flush actuation via flush plate
- Screwable flush plate
- Power supply via power supply unit
- External power supply unit
- Transformation of mains voltage to extra-low voltage, 4.1 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- With push-fit connection with cross-polarity protection
- Infrared user detection with background fade-out
- Self-adjusting IR sensor
- Reliable IR distance detection
- Interval flush preset
- Adjustable interval flush
- Preflush can be set
- Minimum detection time can be set
- Compatible with Geberit Service Handy

- Functions can be set and queried with the Geberit Service Handy
- Flush actuation can be deactivated via Geberit Clean Handy
- Low-noise lifting mechanism
- Electrical lifting device, self-calibrating
- Vandal-resistant
- Easy maintenance and cleaning

**Technical data**

Protection degree	IP45
Nominal voltage	85-240 V AC
Mains frequency	50-60 Hz
Operating voltage	4.1 V DC
Interval flush, adjustment range	1-168 h
Interval flush, factory setting	24 h
Detection time, adjustment range	1-60 s
Detection time, factory setting	7 s

**Scope of delivery**

- Flush plate Sigma10
- Mounting frame with infrared control, premounted
- Protection plate
- Support block with servomotor and lifting device, premounted
- Actuator rod
- Fastening material

**To order additionally**

- Installation set for Geberit WC flush controls with electronic flush actuation

Art. no.	Surface / colour	Material designation
115.890.SN.5	Plate and button: brushed Design ring: polished	Stainless steel

**Accessories**

- Geberit Service Handy
- Geberit Clean Handy



- Requires transformer 115.861.00.1

Created with Geberit online product catalogue - 21/06/2018