
# GEBERIT

# Geberit WC flush control with electronic flush actuation, mains operation, dual flush, flush plate Sigma80, touchless

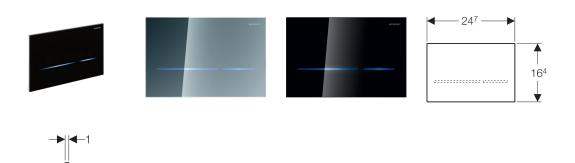

### **Application purposes**

- · For private and semipublic areas
- · For releasing a dual flush
- · For solid and drywall construction
- For touchless flush actuation of Geberit Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block
- Suitable for less-abled installation

#### Characteristics

- · Touchless manual flush actuation
- · Automatic flush actuation can be activated
- Flush actuation possible via external push-button
- Flush plate without mechanical buttons
- Actuator buttons identifiable by light bars
- Button illumination activated when approached
- · Button illumination can be set in five colours
- Orientation light can be activated
- Power supply via power supply unit
- External power supply unit
- Transformation of mains voltage to extra-low voltage, 4.1 V DC
- Flush actuation can be manually deactivated for cleaning
- · Operation with extra-low voltage, no mains voltage in cistern
- With push-fit connection with cross-polarity protection
- · Infrared user detection with background fade-out
- · Self-adjusting IR sensor
- Reliable IR distance detection
- · User detection range can be set
- Adjustable interval flush
- Preflush can be set

#### Art. no. Surface / colour

116.090.SG.1

black

- Minimum detection time can be set
- Compatible with Geberit Service Handy
- Functions can be set and queried with the Geberit Service Handy
- Flush actuation can be deactivated via Geberit Clean Handy
- Low-noise lifting mechanism
- Electrical lifting device, self-calibrating
- Lockable
- · Easy maintenance and cleaning

#### Technical data

Protection degree	IP45
Nominal voltage	85-240 V AC
Mains frequency	50-60 Hz
Operating voltage	4.1 V DC
Interval flush, adjustment range	1-168 h
Interval flush, factory setting	Off
Detection time, adjustment range	1-60 s
Detection time, factory setting	7 s

#### Scope of delivery

- Flush plate Sigma80
- Mounting frame
- · Support block with servomotor and lifting device, premounted
- Fastening material

#### To order additionally

 Installation set for Geberit WC flush controls with electronic flush actuation



Art. no.	Surface / colour
116.090.SM.1	glass, reflective

## Accessories

- Geberit Service Handy
- Geberit Clean Handy



• Requires transformer 115.861.00.1

Created with Geberit online product catalogue - 21/06/2018