


**Geberit urinal flush control with pneumatic flush actuation, flush plate type 50**

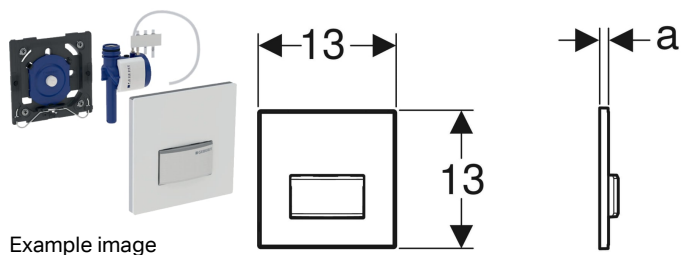

**Application purposes**

- For manual flush actuation of urinals
- For Geberit frames for urinal with front actuation
- For installation in installation sets for Geberit urinal flush controls (from year of manufacture 2009)

**Characteristics**

- Flush plate with securing bar
- Flush time setting with air nozzles (pneumatic)
- Low flush actuation force
- Short stroke movement
- Flush actuation when the actuator button is released
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set

**Technical data**

Flow pressure	1-8 bar
Maximum test pressure, water	16 bar
Maximum test pressure, air / inert gas	3 bar
Relative humidity	< 100 %
Maximum operating temperature, water	30 °C
Actuation force	< 12 N
Flow rate at 1 bar without flow limiter	0.3 l/s
Flow rate at 1 bar with flow limiter	0.18 l/s
Calculated flow rate	0.22 l/s
Minimum flow pressure for calculated flow rate	1 bar
Flush time, adjustment range	4/8/12 s

**Scope of delivery**

- Flush plate type 50
- Pneumatic flush actuation, premounted on mounting frame
- Pneumatic valve
- Fastening material

Art. no.	Colour / surface	Material designation	a
116.016.11.5	white alpine	Die-cast zinc / plastic	1.1 cm
116.016.DW.5	jet black RAL 9005	Die-cast zinc / plastic	1.1 cm
116.016.SD.5	smoked glass reflective	Die-cast zinc / glass	1.2 cm
116.016.SE.5	green / satinised	Die-cast zinc / glass	1.2 cm
116.016.SQ.5	umber	Die-cast zinc / glass	1.2 cm
116.016.GH.5	chrome-plated, brushed	Die-cast zinc / brass	1 cm
116.016.00.5	customised	Die-cast zinc	0.8 cm
116.016.JL.5	sand grey	Die-cast zinc / glass	1.2 cm



- Art. no. 116.016.00.5 - for custom-made inlay i.e. tile to be sourced by customer, maximum depth 3-4 mm, template included
- Can be operated with used water (rainwater) provided it is passed through a filter system first