

Rapid SL set for WC MODEL # 38587000

Pure Freude an Wasser







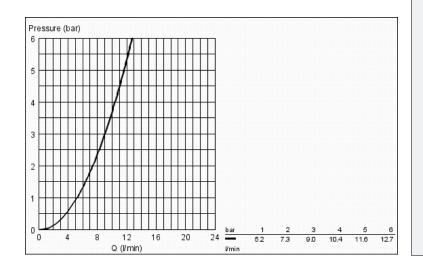

Product Description:

Rapid SL set for WC

Standard Specification: with flushing cistern 6 - 3 I 0.82 m finished installation height for free-standing installation, for on-the-wall installations or studded walls Includes Frame/cistern for wall hung pan Noise protection set Wall brackets for on-the-wall installation (38 558 00M) lockable Fixing bolts for wc and floor GROHE Fresh retrofit set: enables access to concealed cistern to add a cleaning tablet (chlorine free tablets only) Details: 200mm height adjustment, lockable when at required height distance of fixing bolts 180/230 mm outlet bend Ø 90 mm depth adjustable reducer Ø 90/110 mm Insulated against condensation flushing cistern 6 - 9 l pneumatic discharge valve offering 2 modes of operation: dual flush or single flush front/top actuation water supply from left/right or back including integrated angle valve and push fit flexible hose union low noise (group I acc. to German Noise Specification) Insulated against condensation Includes: 1/2" water supply connection including integrated angle valve and push fit flexible hose union inspection shaft incl. protection during construction phase wall brackets 38 558 00M (pair) not included and must be ordered separately

GROHE EcoJoy technology for less water and perfect flow without wall plate/actuation

Pure Freude an Wasser



Color: 38587000