



Nasal Mask (N6)


To remold the image of nasal mask

family cares



Nasal Mask (N6)

Main features



Under-the-nose Cushion

The innovative under-the-nose cushion minimizes the contact with your nose so that no pressure needs to be exerted on the nose bridge.

Circular Dispersion Vent

The circular dispersion vent keep the noise as low as 20dB (A) and meanwhile protect your bed partner from being disturbed.




Modular Main Frame

The main frame is compatible with all cushion sizes.


Three-point-adjustable Headgear

The adjustable headgear is fit for most of the head sizes. Wider range, more inclusiveness.



Technical Specifications

Pressure-Flow
Curve

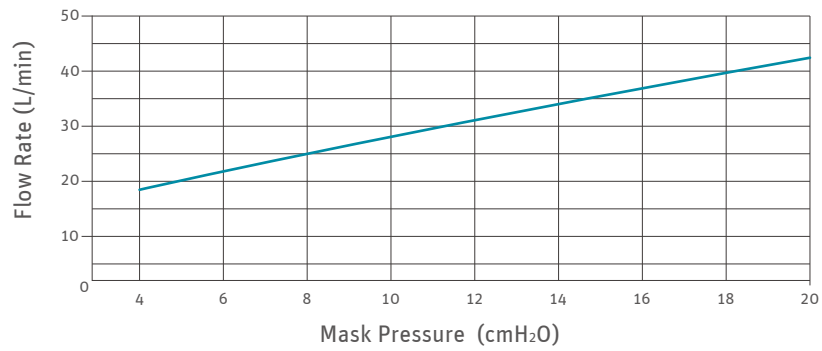

Pressure (cmH ₂ O)	4	8	10	12	16	18	20
Flow Rate (L/min)	17	25	28	31	37	40	42

Therapy Pressure

4 to 20 cmH₂O

Resistance

Drop in Pressure measured (nominal)
at 50 L/min: 0.4 cmH₂O
at 100 L/min: 1.8 cmH₂O

Sound

DECLARED DUAL-NUMBER NOISE EMISSION VALUES in accordance with ISO 4871. The A-weighted sound power level of the mask is 28 dBA, with uncertainty 3 dBA. The A-weighted sound pressure level of the mask at a distance of 1 m is 20 dBA, with uncertainty 3 dBA.



BMC Medical Co., Ltd.

Room 110, Tower A Fengyu Building, No.115 Fucheng Road, Haidian, 100036 Beijing, PEOPLE'S REPUBLIC OF CHINA

Tel: +86-10-5166 3880 / Fax: +86-10-5166 3880 ext. 810 / en.bmc-medical.com

ST-SC-02-21-12-003-V1.0