

DESCRIPTION

RMS Deepfill is a versatile, trowel applied, three component Epoxy resin-based, deep section screed/mortar. The product is supplied in a 'natural' or concrete grey colour and may be sealed or topped with any of the range of RMS Epoxy coatings or sealers as required.

TYPICAL USES

As a deep section protective screed for floor areas subject to impact, abrasion and chemical spillage. As an economical, fast curing in-fill screed/mortar prior to the application of the final floor finish. As a thick section Epoxy bedding mortar for kerbs, etc.

ADVANTAGES

- Ease of application
- Fast curing characteristics
- Economical
- Hard wearing and durable
- Taint free
- Frost resistant and impervious to water
- Negligible shrinkage even in thick section

TYPICAL PROPERTIES

Colour: Natural or grey (other colours available upon request)

Density: 2200kg/m³


Pot Life: 50-60 minutes @ 20°C

Adhesion to concrete: 3.6MPa (concrete failure)

Compressive Strength: 64MPa

Chemical resistance: Excellent resistance to dilute acids and alkalis, oil, petrol, diesel, vegetable oils, inorganic salts, and cleaning fluids

PROCEDURE

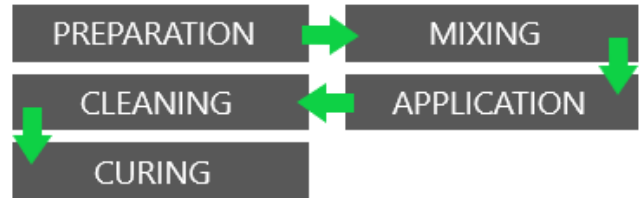

SURFACE PREPARATION

Remove all laitance, spalled concrete, grease, oil, dust, and other contaminants by scabbling or bush hammering, to provide a sound, clean, substrate. Any exposed reinforcing steel shall be fully exposed by cutting out around its full circumference, and cleaned by abrading or grit blasting to remove rust, scale, etc. Metal substrates shall be degreased, and grit blasted to Sa 2.5 Swedish Standard.

PRIMING

Apply a coat of RMS Tackprime by brush or roller at a nominal rate of 3.5 to 7.0m²/kg, depending upon surface profile.

MIXING

The use of mechanical, forced action mixer such as a Creteangle, is strongly recommended. Pour the contents of the CURING AGENT container into the BASE container and mix thoroughly. The mixed resins shall be poured into a mixing vessel, (Creteangle bucket or similar), and the AGGREGATE added steadily whilst the mixer is in motion. Mix for 2-3 minutes until a uniform material is achieved. **Once mixed, ensure the product is either transferred straight into a scuttle or directly to the floor to reduce the speed of the exothermic reaction.**

APPLICATION

RMS Deepfill shall be applied whilst the primer is still 'tacky' i.e., within 2 hours of application.

The material should be tamped and trowelled to ensure good compaction and a tight finish.

Minimum application thickness is 10mm; maximum application thickness is 50mm for large areas.

Note: up to 100mm thickness may be applied in small patches

EQUIPMENT CLEANING

Clean equipment with RMS Toolclean prior to curing of the coating.

CURING

RMS Deepfill will have hardened sufficiently after overnight cure @ 20°C. to allow overcoating or full trafficking. Longer periods of cure will be necessary at lower temperatures. Full mechanical and chemical resistant properties will be achieved following 7 days cure @ 20°C.

STORAGE AND SHELF LIFE

Store in dry conditions at temperatures between 10°C and 25°C. Avoid low temperature storage prior to use of the material. Do not expose to freezing conditions. RMS Deepfill has a minimum shelf life of 12 months when stored in original, unopened containers in accordance with manufacturer's instructions.

COVERAGE

A 25kg pack of RMS Deepfill yields 11.4 litres of material, sufficient for 1.14m² @ 10mm thickness.

LIMITATIONS

Do not apply to wet or uncured concrete surfaces. Do not apply at temperatures of 3°C or less.

HEALTH & SAFETY

Wear gloves and goggles.

Wash off splashes immediately with soap and water. Any eye contamination must be rapidly irrigated with copious amounts of water, and immediate medical attention sought.

Please refer to Material Safety Data Sheet for additional information.

RMS Deepfill shall be applied strictly in accordance with the manufacturer's instructions.

DOCUMENT VERSION

VERSION: 2

DATED: 07/06/2021