


GEORGIAN | G5400 Specifications

sink mixer small

OXFORD & NELSON

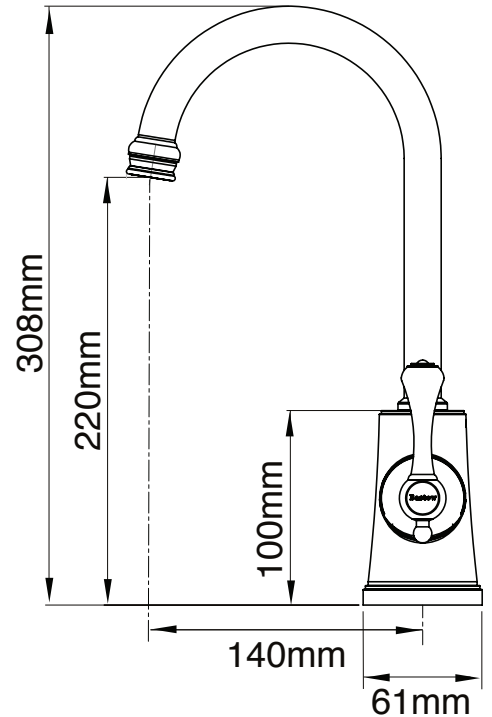

Features

Recommended Use	Domestic, Commercial, Hotel
Material	Brass Body
Handle	Lever Handle, Porcelain Lever Handle
Tap Outlet	Fixed, Swivel and English
Finishes	Satin Chrome, Nickel, Brushed Nickel, Gold, Brass Gold N18, Brushed Gold N18, Rose Gold, Brushed Rose Gold, Matt Black, Black Sapphire, Brushed Black Sapphire, Gunmetal, Satin Pearl, Copper, Antique Copper
Dimensions	140W x 100D x 308H mm x 61Ø mm Flange
Standards	AS/NZS 3718
WELS Rating	Flow Rate: 6L/min, Stars: 5



Disclaimer:

Products in this specification manual must by regulation be installed by licensed and registered trade people. Under our commitment to product development and improvement, we may change product specifications and dimensions or delete models from the range without prior notification. Dimensions and set-outs listed are correct at time of publication and could contain dimensions which are approximate due to tolerances in manufacturing processes. It is important that you thoroughly review the product and check specifications and dimensions prior to surface preparation, cut-out and installation.

During the installation of the product by a qualified trained personnel, make sure that the entire fastening surface is even and smooth (no protruding seams or tile offset), that the finish of the wall is suitable to apply the product and has no weak points. It is recommended that all accessories are secured to timber studs.

BASTOW™

Cleaning Instructions

We recommend the use of soapy water or approved cleaners.

This product should not be cleaned with abrasive materials.

Damage caused by any improper treatment is not covered by the product warranty - refer to our Warranty Conditions.

Specifications

Pressure Rating	As per AS/NZS3500 pressure must be limited to 500kPa on any new home, extension or renovation. For best performance and longer life we recommend 150-500kPa. Hot and cold water inlet pressure should be equal.
Temperature Rating	80°C maximum continuous working temperature
Suitable Hot Water Units	Storage Tank - Yes Continuous Flow - Yes Gravity Feed - Yes

For the Plumber

Check 1. All work should be carried out by a licensed plumber. Responsibility will not be accepted by Tribata for incorrect installation of this tapware, or any tapware not installed by a Registered Plumber.

Check 2. The water supply lines need to be 'flushed out' prior to installation. This will avoid any foreign materials blocking the flow regulator, damaging the cartridge/valve and reducing the flow of water.

Check 3. Ensure all connections are tight.

Check 4. Turn on the main water supply and check for leaks.

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference

Disclaimer:

Products in this specification manual must by regulation be installed by licensed and registered trade people. Under our commitment to product development and improvement, we may change product specifications and dimensions or delete models from the range without prior notification. Dimensions and set-outs listed are correct at time of publication and could contain dimensions which are approximate due to tolerances in manufacturing processes. It is important that you thoroughly review the product and check specifications and dimensions prior to surface preparation, cut-out and installation.

During the installation of the product by a qualified trained personnel, make sure that the entire fastening surface is even and smooth (no protruding seams or tile offset), that the finish of the wall is suitable to apply the product and has no weak points. It is recommended that all accessories are secured to timber studs.

Installation Instructions

IMPORTANT INFORMATION, please read before starting installation.

CHECK 1

For packaging purposes, this tapware may come partially assembled.

CHECK 2

Before installation, please ensure that you have checked the assembly of all components and joints.

CHECK 3

Always use plumbers tape or a recommended sealing compound on all threaded joints.

CHECK 4

Please pressure test the tapware prior to installation using recommended testing equipment.

CHECK 5

The installer is responsible for selecting the correct fittings and that the distances are correct before installation.

Plumber Instructions

Note: Tribata recommend fitting Isolation Stop taps to the inlet connections.

Note: Do not make brazed connections directly to the mixer as heat will cause damage.

Note: Please flush the supply lines prior to installation.

INSTALLATION

1. Mount the mixer body to a suitable support timber in the wall and secure with screws. When facing the mixer the connections should be:

- Hot water inlet connection 'H' to the left.
- Cold water inlet connection 'C', to the right
- Mixed water outlet connection, vertically upwards.
- Check all connections for leaks.

Important: Mixer body must be installed square to the wall/tile face to ensure cover plate sits flush.

2. Fit cover plate followed by retaining ring onto the mixer body. Slide retaining ring along mixer body until cover plate abuts wall/tile face.

3. Fit handle, taking care that it is pushed fully down. Tighten grub screw using the allen key provided.

4. Turn on hot and cold water supply and check operation.

REPLACING THE CARTRIDGE

1. Turn off hot and cold water supplies.

2. Loosen grub screw and remove handle. Unscrew cap, remove lock nut and lift out cartridge.

3. Ensure inside of mixer body is clean, check the rubber seal is in position in base of new cartridge, and fit new cartridge into mixer body. Ensure two lugs on base of cartridge fit into the holes in mixer body.

4. Screw on lock nut, and use spanner to firmly tighten the lock nut, then screw on cap.

5. Assembly of handle is a reversal of removal procedure.

Disclaimer:

Products in this specification manual must by regulation be installed by licensed and registered trade people. Under our commitment to product development and improvement, we may change product specifications and dimensions or delete models from the range without prior notification. Dimensions and set-outs listed are correct at time of publication and could contain dimensions which are approximate due to tolerances in manufacturing processes. It is important that you thoroughly review the product and check specifications and dimensions prior to surface preparation, cut-out and installation.

During the installation of the product by a qualified trained personnel, make sure that the entire fastening surface is even and smooth (no protruding seams or tile offset), that the finish of the wall is suitable to apply the product and has no weak points. It is recommended that all accessories are secured to timber studs.